


DETAIL A:

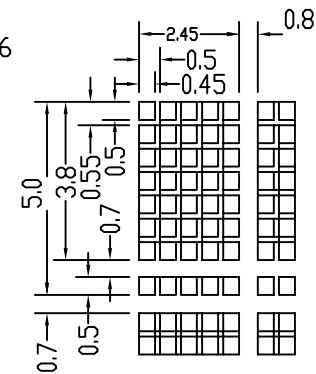

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
V _{SS}	V _{CC}	V _{EE}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K	NC	NC

NOTE:

- 1. DISPLAY TYPE: TN
- 2. VIEWING DIRECTION: 6:00
- 3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5. LCD OPERATING VOLTAGE: 4.7V
- 6. OPERATING TEMP: -30°C~+80°C
- 7. STORAGE TEMP: -40°C~+90°C
- 8. CONTROLLER: S6A0069X01-COCX(KS0066UP-00CC)
- 9. BACKLIGHT TYPE: LED
- 10. BEZEL IS TO BE PAINTED BLACK
- 11. ALL UNMARKED TOLERANCES: ±0.3mm

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI0802B	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:		SHEET NO: OF