


| | | | | | | | | | | | | | | | |
|-----|-----|-----|----|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| Vss | Vcc | Vee | RS | R/W | E | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | A | K |

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW GREEN
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: -20°C-70°C
- 5.STORAGE TEMP: -30°C-80°C
- 6.BACKLIGHT TYPE: LED
- 7.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 8.LCD OPERATING VOLTAGE: 4.7V
- 9.CONTROLLER : S6A0069X01-CDCX
- 10.UNMARKED TOLERANCE: ±0.3mm
- 11.BEZLE IS TO BE PAINTED BLACK
- 12.TNE CONTROLLED DIMENSION MASK TO BE :
- 13.REQUIERMENT ON ENVIRONMENT PROTECTION: RoHS

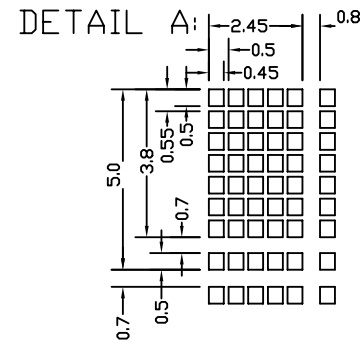

Multi-inno Technology Co.,Ltd.

| | | |
|---------------|-------------------|----------|
| DRAWN BY: | TITLE: MI0802E | |
| CHECKED BY: | DWG NO: G-1 | |
| APPROVED BY: | DWG NAME: MI0802E | UNIT: mm |
| CONFIRMED BY: | SHEET NO: OF | |