




MULTI-INNO TECHNOLOGY CO.,LTD.

MI1602D-G

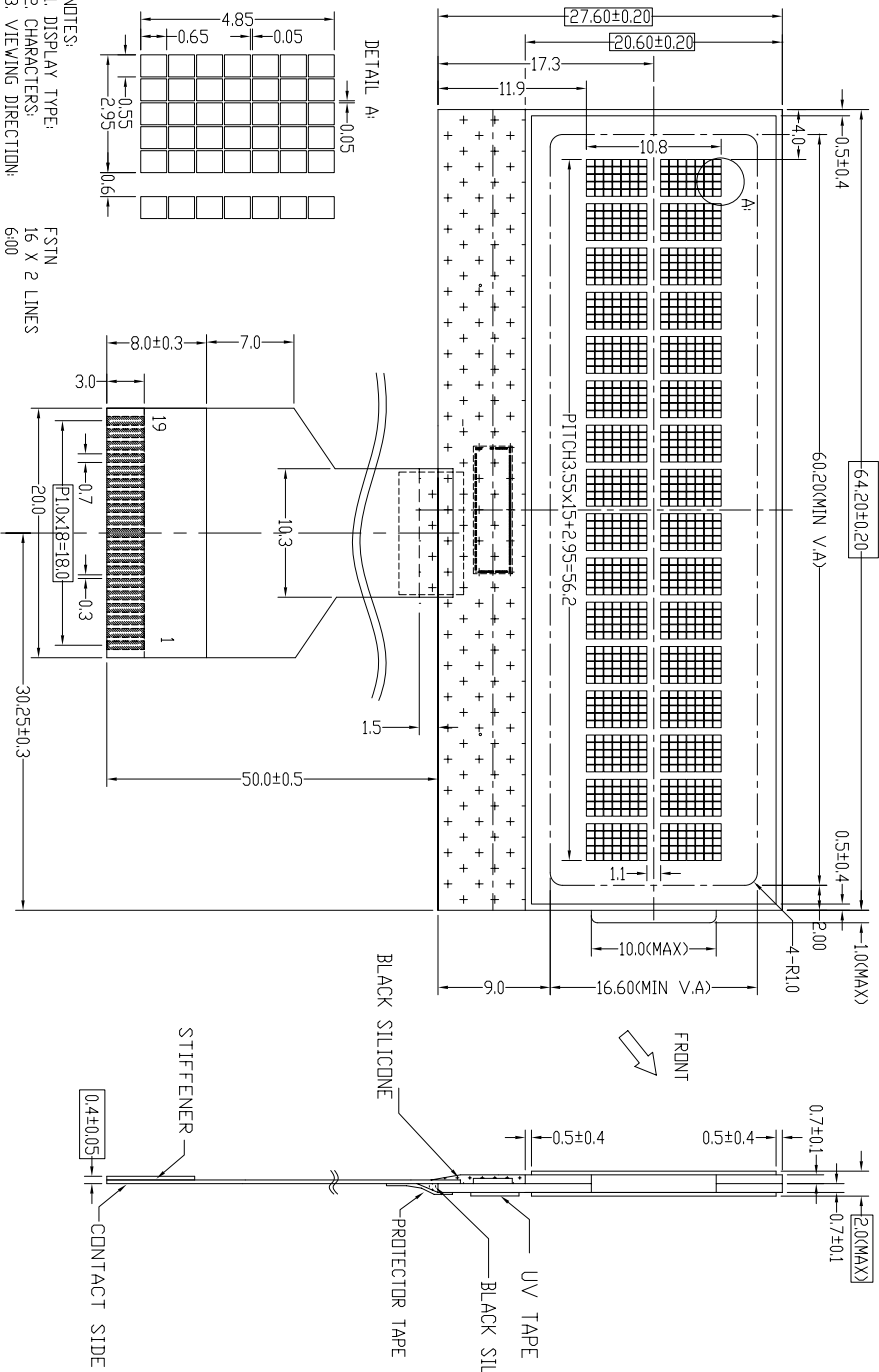

- NOTES:
1. DISPLAY TYPE: FSTN
 2. CHARACTERS: 16 X 2 LINES
 3. VIEWING DIRECTION: 600
 4. POLARIZER MODE: REFLECTIVE/POSITIVE
 5. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 6. LCD OPERATING VOLTAGE: 6.5V
 7. VDD=3.0V
 8. OPERATING TEMP: -20°C+70°C
 9. STORAGE TEMP: -30°C+90°C
 10. CONNECTOR: FPC
 11. CONTROLLER: ST7032-0D
 12. UNMARKED TOLERANCES: ±0.2mm
 13. THE CONTROLLED DIMENSION MASK TO BE
 14. REQUIREMENT ON ENVIRONMENTAL PROTECTION: ROHS
 15. PERFORMANCE MAY NOT BE OPTIMIZED AT THE EXTREME TEMPERATURE RANGE

PIN	1	2	3	4	5	6	7	8	9	10
SYMBOL	RES	RS	CSB	R/W	E	DB0	DB1	DB2	DB3	DB4
PIN	11	12	13	14	15	16	17	18	19	
SYMBOL	DB5	DB6	DB7	VSS	VDD	VOUT	PSB	PS1	PS2	CLS

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI1602D-G	SCALE:	1:1
CHECKED BY:	DWG NO: G-2	UNIT:	mm
APPROVED BY:	DWG NAME: MI1602D-G G-2	SHEET NO:	0P
CONFIRMED BY:	CHANGE THE CONTROLLER TO ST7032-0D		