

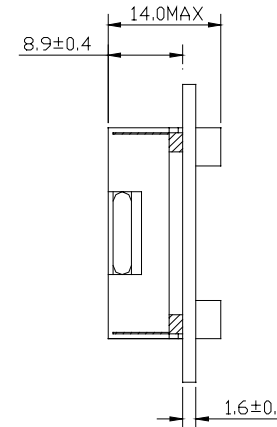


↑ 6 O' CLOCK VIEWING DIRECTION

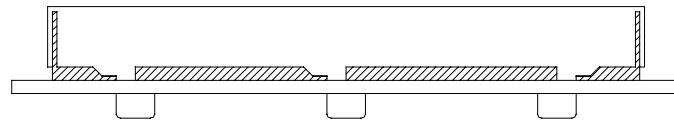

PIN DESCRIPTION

NO.	SYMBOL	NO.	SYMBOL
1	V <sub>SS</sub>	9	DB2
2	V <sub>DD</sub>	10	DB3
3	V <sub>O</sub>	11	DB4
4	R <sub>S</sub>	12	DB5
5	R/W	13	DB6
6	E	14	DB7
7	DB0	15	LED+
8	DB1	16	LED-

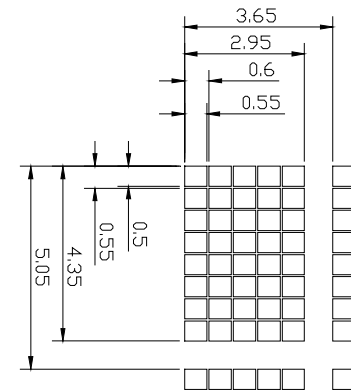

DETAIL "A"

NOTES:

1. DISPLAY TYPE:STN/Yellow-Green
2. VIEWING DIRECTION:6 O' CLOCK
3. POLARIZER TYPE:TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD:1/16DUTY, 1/5BIAS
5. LCD DRIVING VOLTAGE:4.5V
6. LOGIC SUPPLY VOLTAGE:5V
7. OPERATING TEMP:0°C TO 50°C
8. STORAGE TEMP:-20°C TO 70°C
9. CONTROLLER IC:ST7066U-0A/ST7065C
10. CONNECTOR TYPE:COB
11. BACKLIGHT:LED(YELLOW-GREEN)  
Voltage=4.2V  
Brightness>=100cd/m(without LCD)