


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

NOTE:

- 1: DISPLAY TYPE: STN/BLUE MODE
- 2: VIEWING DIRECTION: 6:00
- 3: POLARIZER MODE: TRANSMISSIVE/NEGATIVE
- 4: OPERATING TEMP: 0°C--+50°C
- 5: STORAGE TEMP: -20°C--+60°C
- 6: LCD OPERATING VOLTAGE: 4.3V
- 7: DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 8: BACKLIGHT TYPE: LED
- 9: CONTROLLER: S6A0069X01-C0CX(KS0066UP-00CC)
- 10: ALL UNMARKED TOLERANCES: ±0.3mm
- 11: BEZEL IS TO BE PAINTED BLACK
- 12: REQUIREMENTS ON ENVIRONMENTAL PROTECTION: ROHS

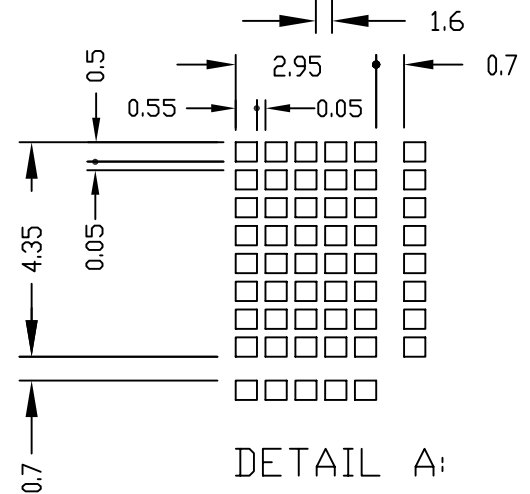

DETAIL A:

G-2	ADD NOTE 12		
		MULTI-INNO TECHNOLOGY CO.,LTD.	
DRAWN BY:		TITLE: MI1602V	
CHECKED BY:		DWG NO: G-2	
APPROVED BY:		SCALE:	
CONFIRMED BY:		UNIT: mm	
		SHEET NO: OF	