


MI1604F

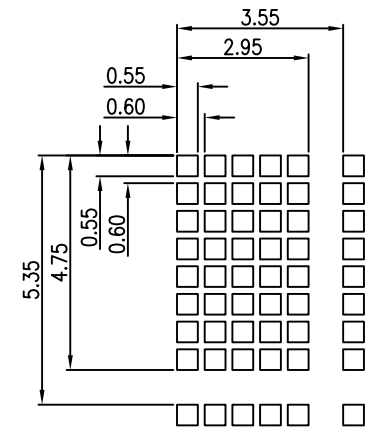

DISPLAY PATTERN:

DISPLAY DATA ADDRESS:

CHARACTER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
LINE1	80	81	82	83	84	85	86	87	88	89	8A	8B	8C	8D	8E	8F
LINE2	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	CA	CB	CC	CD	CE	CF
LINE3	90	91	92	93	94	95	96	97	98	99	9A	9B	9C	9D	9E	9F
LINE4	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	DA	DB	DC	DD	DE	DF

PIN CONNECTION:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	V <sub>0</sub>	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	V <sub>LED</sub>	V <sub>LSS</sub>

NOTES:

1. DISPLAY TYPE: STN, YELLOW-GREEN MODE, TRANFLECTIVE/POSITIVE.
2. DRIVE METHOD: 1/16DUTY, 1/5BIAS,VDD=5V VOP=4.2V
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: KS0070B AND KS0063B OR EQUIVALENT.
5. OPERATING TEMP: -20~+70°C.
6. STORAGE TEMP: -30°C~+80°C.
7. LED BACKLIGHT: BOTTOM, YELLOW-GREEN .
8. ALL UNMARKED TOLERANCES: ±0.5.

CUSTOMER APVL		DATE	
DRAWN		SCALE	TITLE
DFTG CHK		UNIT	MI1604F
ENGR CHK		mm	MODEL
APPROVAL		MODEL	
MULTI-INNO TECHNOLOGY CO.,LTD		DWG NO	PAGE