


| | | | | | | | | | | | | | | | |
|-----|-----|-----|----|-----|---|-----|-----|-----|-----|-----|-----|-----|-----|------|------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | A | K |
| Vss | Vcc | Vee | RS | R/W | E | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | LED+ | LED- |

NOTES:

- | | |
|----------------------------------|------------------------|
| 1. DISPLAY TYPE: | STN/YELLOW-GREEN MODE |
| 2. VIEWING DIRECTION: | 6:00 |
| 3. POLARIZER MODE: | TRANSFLECTIVE/POSITIVE |
| 4. DRIVE METHOD: | 1/16 DUTY 1/4 BIAS |
| 5. LCD OPERATING VOLTAGE: | 4.3V |
| 6. OPERATING TEMP: | 0°C-+50°C |
| 7. STORAGE TEMP: | -10°C-+60°C |
| 8. BACKLIGHT TYPE: | LED |
| 9. CONTROLLER: | S6A0069 OR EQUIVALENT |
| 10. ALL UNMARKED TOLERANCE: | ±0.3mm |
| 11. BEZEL IS TO BE PAINTED BLACK | |

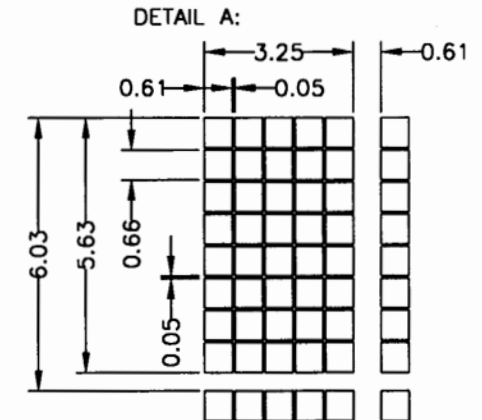

MULTI-INNO TECHNOLOGY CO.,LTD.

| | | |
|---------------|----------------|----------|
| DRAWN BY: | TITLE: MI2002K | |
| CHECKED BY: | DWG NO: G-2 | |
| APPROVED BY: | DWG NAME: | UNIT: mm |
| CONFIRMED BY: | SHEET NO: OF | |