


Pin No.	1	2	3	4	5	6	7	8	9	10	11 - 18	19	20
Symbol	HEATER-	THERMISTOR+	THERMISTOR-	HEATER+	VSS	VDD(+5V)	NC	RS	R/W	E	DB0 - DB7	LED+	LED-

NOTE:

1. DISPLAY MODE: STN-TRANSFLECTIVE-POSITIVE-YELLOW-GREEN
2. CONTROLLER: KS0066U OR COMPATIBLE
3. ON BOARD NEGATIVE VOLTAGE GENERATOR AND TEMPERATURE COMPERSATION CIRCUIT
4. LCD HEATER BUILD IN (PROVIDED BY CUSTOMER)
5. BACKLIGHT: LED,PURE GREEN, WAVELENGTH=557nm, If=180mA, Vf=4.2V
6. OP. TEMP.: -20°C TO 75°C, ST. TEMP.: -4.0°C TO 85°C
7. ALL DIMENSION UNIT ARE IN mm, TOLERANCE UNLESS SPECIFIED: ±0.3 mm
8. LCD DRIVER: 1/16DUTY, 1/5BIAS, VOP=9.6V, VDD=5.0V
9. VIEWING DRICITION: 6:00

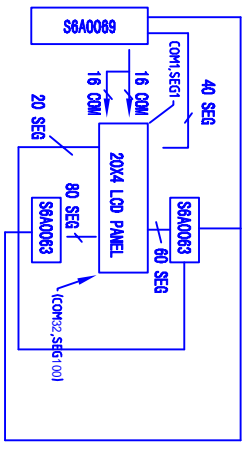

更改记录

更改标记	日期	更改内容	设计	审核	批准	设计	审核	工艺	标准化	批准	产品型号	M120041
											文件编号	
						日期					分文件号	
											页数	1
											单位	mm
											MULTI-INNO	
											TECHNOLOGY CO.,LTD	

