


PIN CONNECTIONS:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VLED	VLSS

Display Pattern

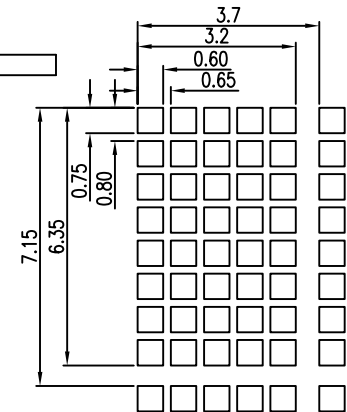

NOTES:

1. DISPLAY TYPE: STN, YELLOW-GREEN MODE, REFLECTIVE/POSITIVE.
2. DRIVE METHOD: 1/16DUTY, 1/5BIAS, VDD=5.0 V, VOP= 4.2 V,
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: KS0066U AND KS0063B OR EQUIVALENT.
5. OPERATING TEMP: 0 °C ~ 50 °C.
6. STORAGE TEMP: -10 °C ~ 60 °C.
8. ALL UNMARKED TOLERANCES: ±0.5.

MULTI-INNO TECHNOLOGY CO.,LTD

MI2402E