


PIN DESCRIPTION

PIN	SYMBOL	DESCRIPTION
1	NC	NC
2	NC	NC
3	LED-	LED-
4	LED+	LED+
5	CS	CS
6	RESETB	RESETB
7	RS	RS
8	LWR	LWR
9	RDB	RDB
10	DO	DO
11	D1	D1
12	D2	D2
13	D3	D3
14	D4	D4
15	D5	D5
16	D6	D6
17	D7	D7
18	D8	D8
19	D9	D9
20	D10	D10
21	D11	D11
22	D12	D12
23	D13	D13
24	D14	D14
25	D15	D15
26	VSS	VSS
27	VDD	VDD
28	NC	NC
29	NC	NC

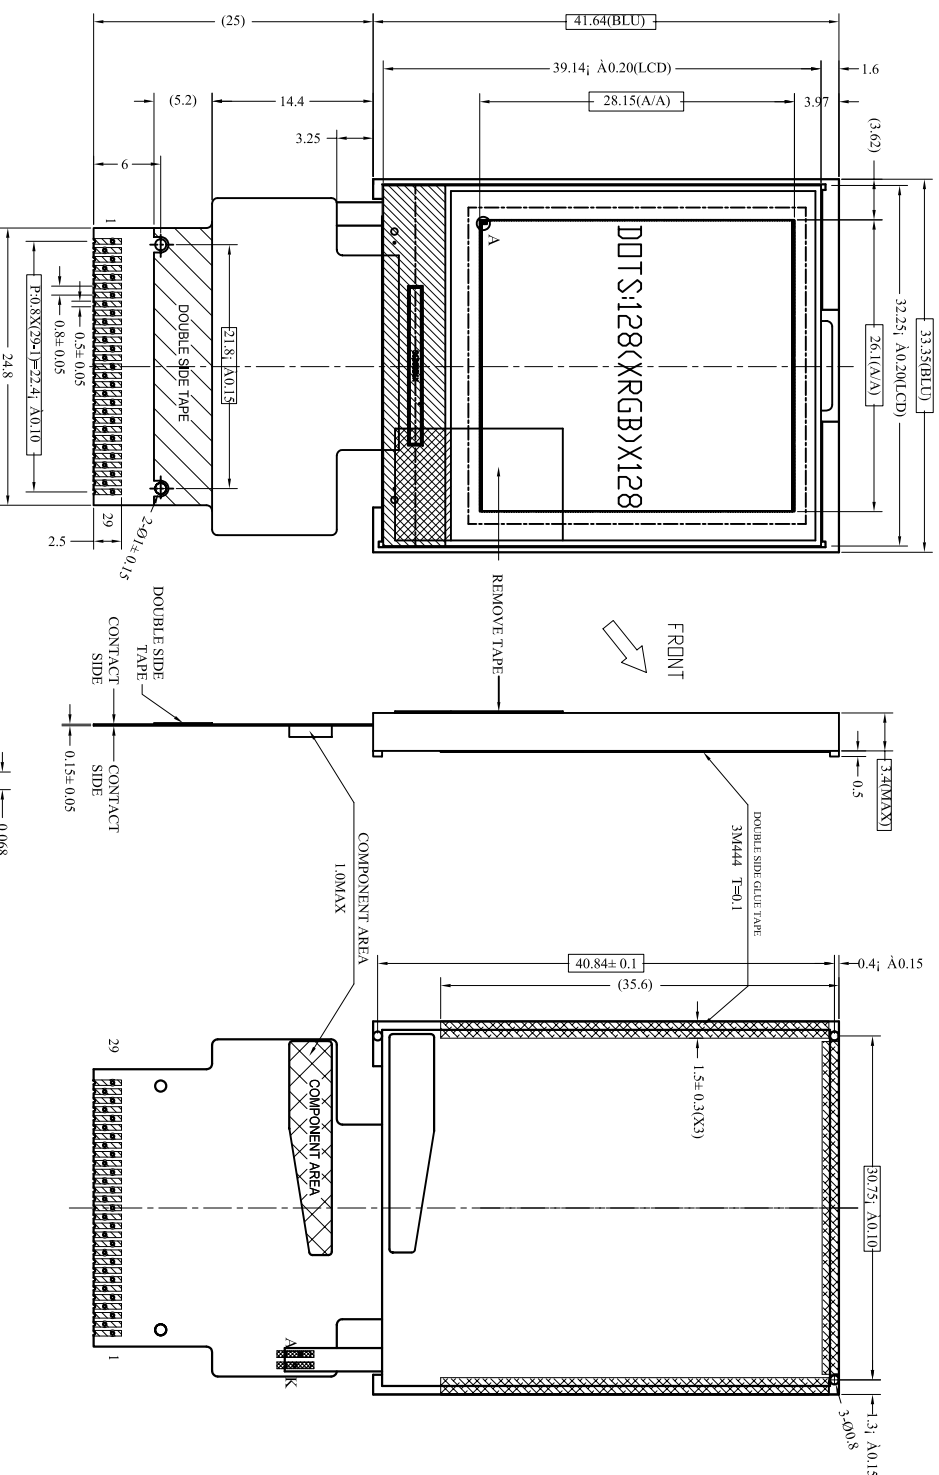

DETAIL A(1TO):

- NOTES:
1. DISPLAY TYPE: CSTN
  2. VIEWING DIRECTION: 6:00
  3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
  4. LCD CONTROLLER: S6B33B6
  5. DRIVE METHOD: 1/128 DUTY 1/5 BIAS
  6. VDD: 3.0V
  7. OPERATING VOLTAGE: 10.6V
  8. BACKLIGHT: 1 CHIP-WHITE LED
  9. OPERATING TEMP: -20°C~70°C
  10. STORAGE TEMP: -30°C~80°C
  11. UNMARKED TOLERANCE: ±0.3
  12.   MEANS IMPRINTANT DIMENSION

MULTI-INNO TECHNOLOGY CO., LTD

DRAWN BY:		TITLE:		M1128128FK	
CHECKED BY:		DWG NO.:		G-1	
APPROVED BY:		DWG NAME:		M1128128FK	
CONFIRMED BY:		SHEET NO.:		1 of 1	
SYMBOL	REVISION	CONTENT	DATE		
	G-1	在G-2的基础上 LED增加一个BIAS	06-2-20		