





PIN DESCRIPTION


No.	SYMBOL
1	NC
2	NC
3	PS
4	MPU1
5	MPU0
6	CS1B
7	RESETB
8	RS
9	WRB
10	RDB
11	D0
12	D1
13	D2
14	D3
15	D4
16	D5
17	D6
18	D7
19	D8
20	D9
21	D10
22	D11
23	D12
24	D13
25	D14
26	D15
27	VSS
28	VDD
29	VRN
30	VRP
31	NC
32	NC
33	NC

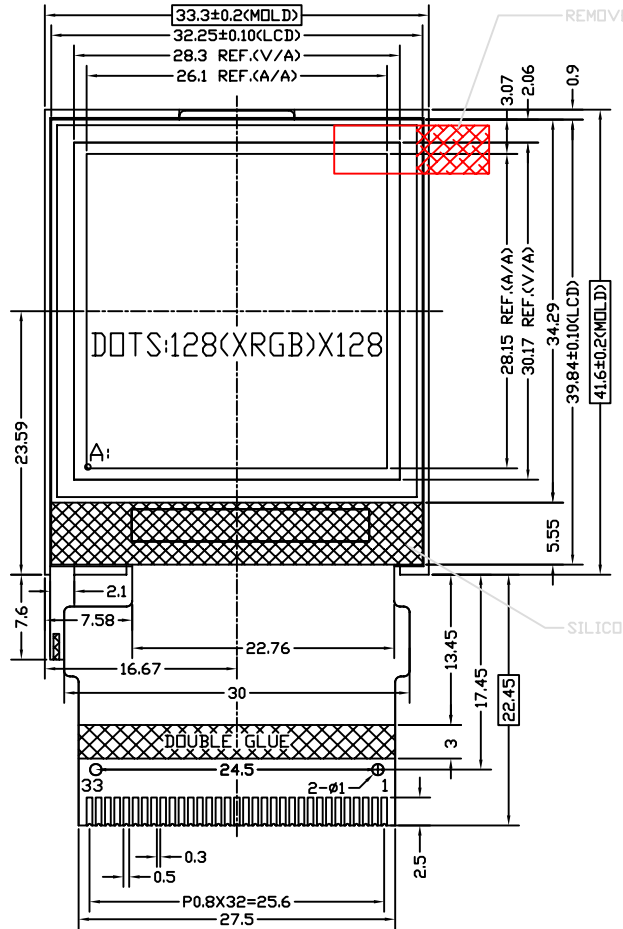

VIEWING DIRECTION

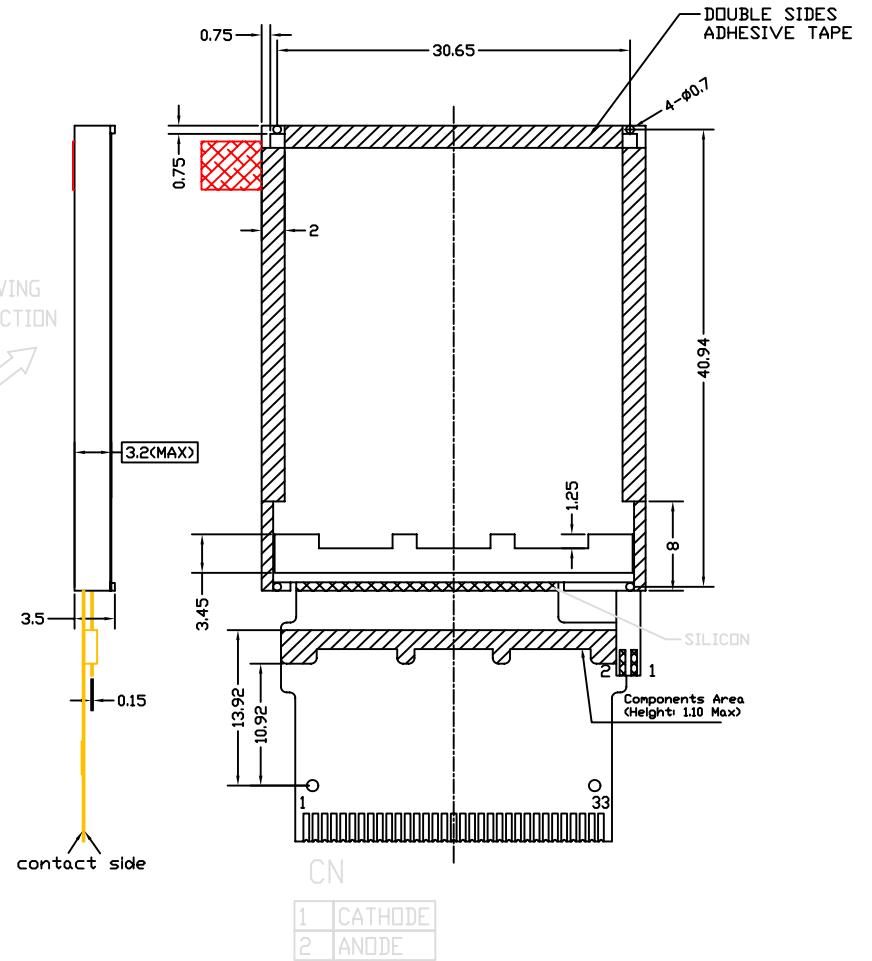

Detail A(BM):



- NOTES:
- 1.DISPLAY TYPE: CSTN
 - 2.VIEWING DIRECTION: 6:00
 - 3.LCD DRIVE IC: S6B33B0A03-B0CY
 - 4.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
 - 5.DRIVE METHOD: 1/128 DUTY 1/5 BIAS
 - 6.VBAT: 3.4~4.2V VDD=3.0V
 - 7.Vop: 9.9V
 - 8.BACKLIGHT: 3CHIP-WHITE LED
 - 9.OPERATING TEMP: -20°C -- 70°C
 - 10.STORAGE TEMP: -30°C -- 80°C
 - 11.UNMARKED TOLERANCE: ±0.30
 - 12.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS