




Customer No.:

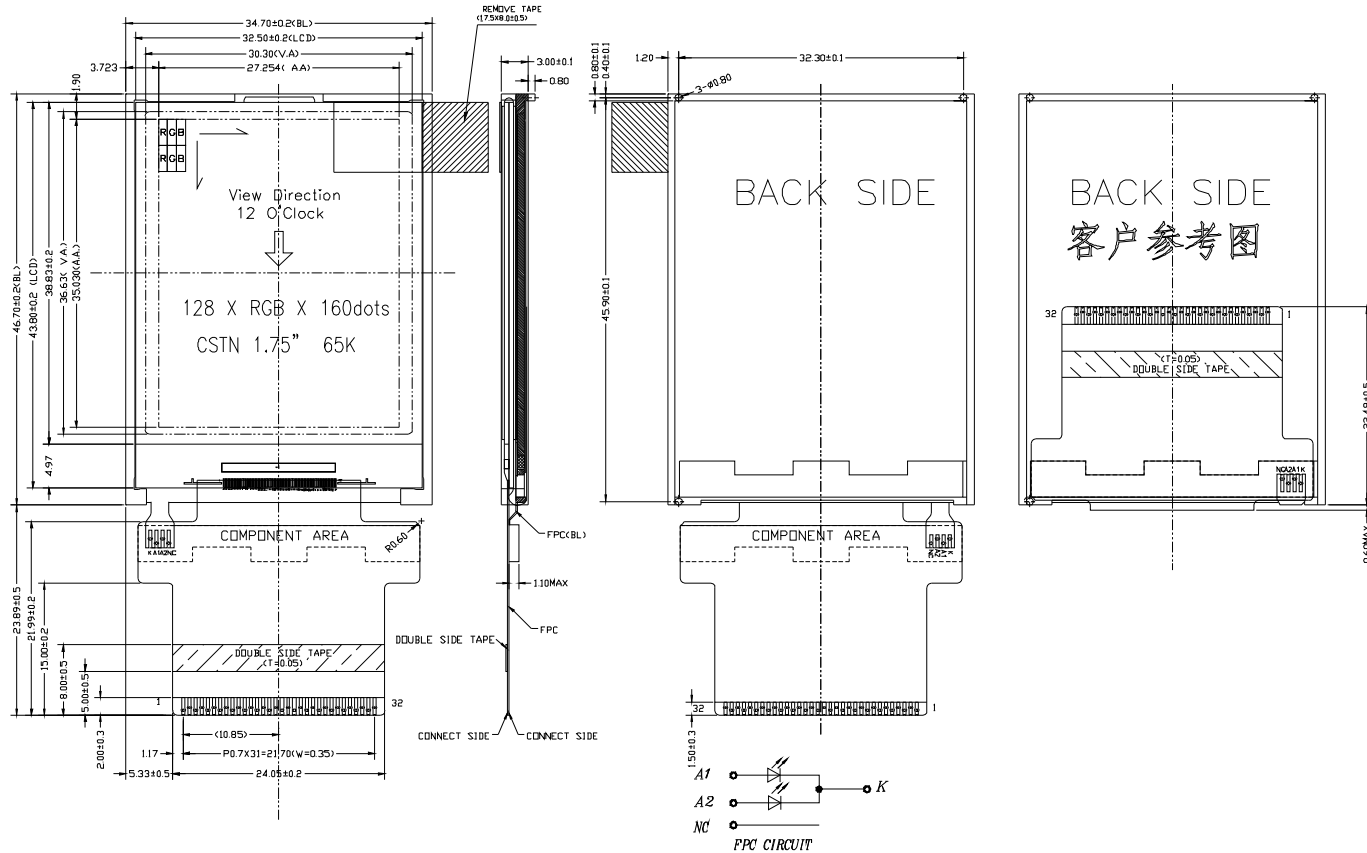

PIN DESCRIPTION

1	LEBK
2	LEDA1
3	LEDA2
4	GND
5	GND
6	VDD
7	MPU1
8	MPU0
9	CS13
10	DB15
11	DB14
12	DB13
13	DB12
14	DB11
15	DB10
16	DB9
17	DB8
18	DB7(SDA)
19	DB6(SCL)
20	DB5
21	DB4
22	DB3
23	DB2
24	DB1
25	DB0
26	RDB
27	WRB
28	RS
29	RSTB
30	MTPD
31	MTPD
32	CDIR

NOTES:

- 1.CSTN/TRANSMISSIVE
2. OPERATING TEMP: -20°C~70°C
3. STORAGE TEMP : -30°C~80°C
4. LCD DRIVER: S6B33BF
- 5.ROHS COMPLIANT

CUSTOMER APPROVE		AMEND		液晶显示模块	MULTI-INNO TECHNOLOGY CO.,LTD.		
Mechanical	Electrical	△			PRODUCT NO.	DRAW NO.	REV
		△			MI128160KK	CXMLCM0068	A
		△			DWN	20070209	DSN
		△			CHKD	20070310	APPD
		NO.	CONTENT	DATE			20070310
					NOT IN SCALE	UNIT mm	SHEET: 1-1