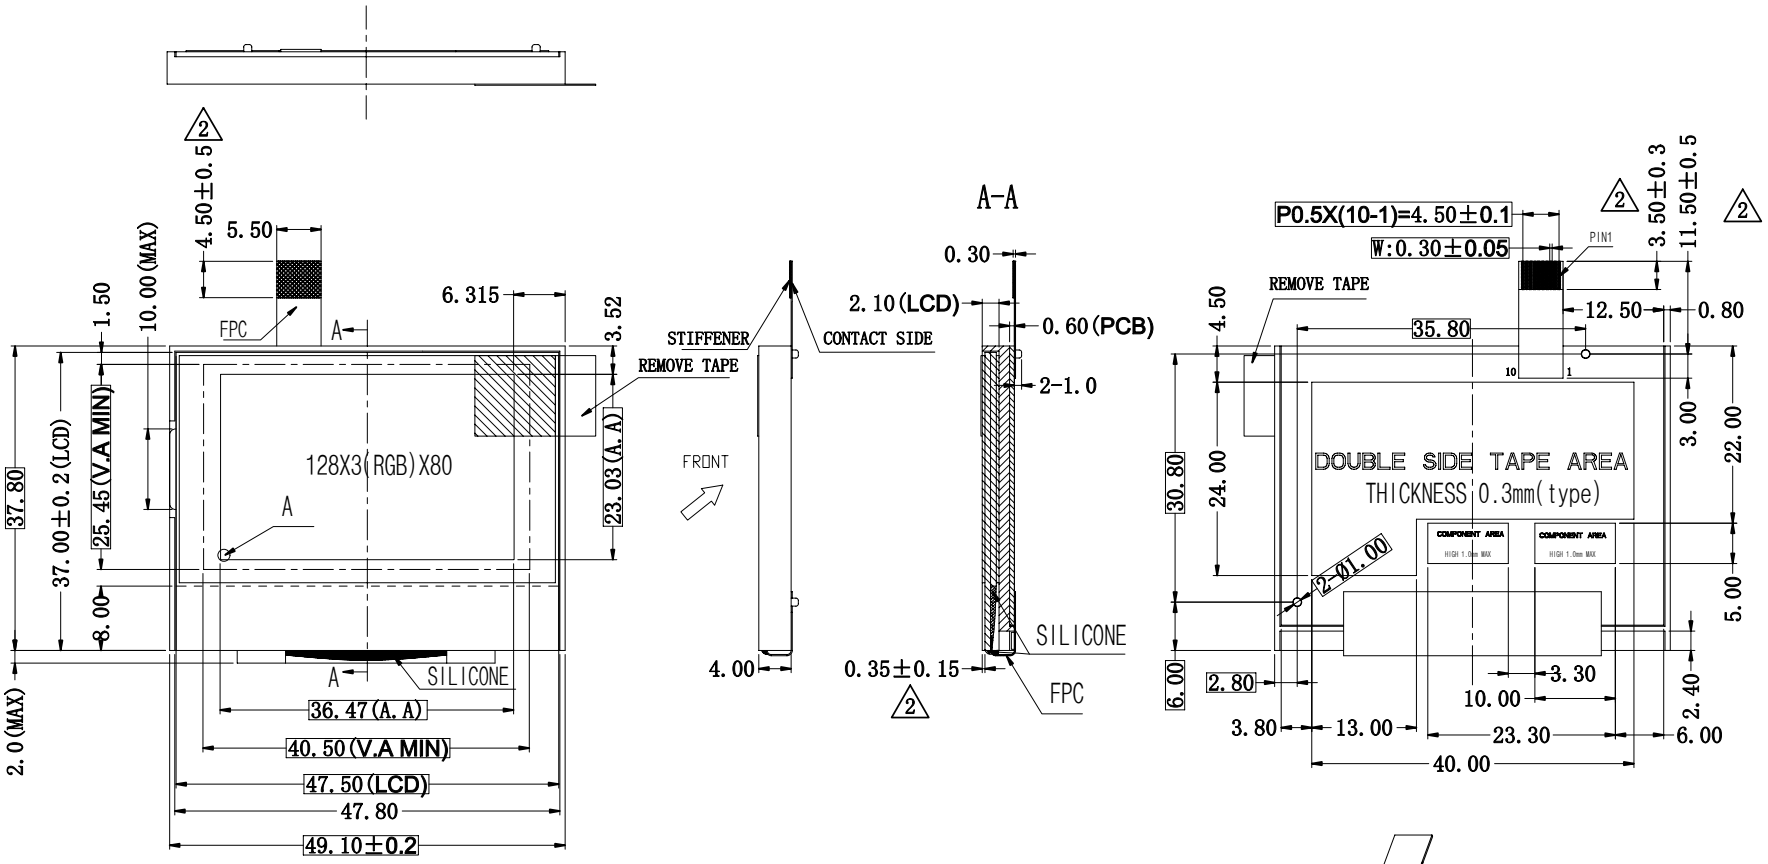

DETAIL A:



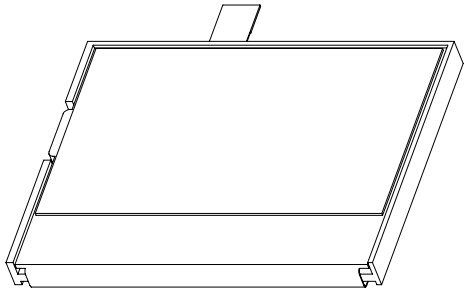

PIN DESCRIPTION

PIN	SYMBOL
1	NC
2	A
3	K
4	SID
5	SCL
6	RS
7	RESET
8	CS1B
9	VSS
10	VDD

NOTES:

1. DISPLAY TYPE:	CSTN
2. VIEWING DIRECTION:	6:00
3. POLARIZER MODE:	TRANSFLECTIVE/NEGATIVE
4. DRIVE METHOD:	1/80 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE:	15.8V
6. LOGIC VOLTAGE:	3.0V
7. OPERATING TEMP.:	-20° C-+70° C
8. STORAGE TEMP.:	-30° C-+80° C
9. CONTROLLOR:	S6B33BG
10. BACKLIGHT:	3 DIES(WHITE;3.0V;45±10mA) ②
11. UNMARKED TOLERANCE:	MECHANIC TOL ±0.3 mm
12. ☐	MEANS IMPORTANT DIMENSION
13. REQUIREMENTS ON ENVIRONMENTAL PROTECTION:	RoHS

MULTI-INNO TECHNOLOGY CO.,LTD.

REV	DESCRIPTION	DATE
G-3	Changed FPC dimension (Change the length of the stiffener and PIN) Change backlight parameter	2007.10.20
G-2	Changed the Vop to 15.8V value from Max to Type Changed backlight voltage	2007.3.20

DRAWN	BY:	TITLE: MI12880AK	
CHECKED	BY:	DWG NO: G-3	SCALE:
APPROVED	BY:		UNIT: mm
CONFIRMED BY:		DWG NAME:	SHEET NO: 1 OF 1