




PIN	SYMBOL
1	V _{LCD}
2	V ₂
3	V ₃
4	V ₄
5	V ₅
6	V _{SS1}
7	V _{SS}
8	V _{DD}
9	D ₀
10	D ₁
11	D ₂
12	D ₃
13	D ₄
14	D ₅
15	D ₆
16	D ₇
17	CL ₂
18	FLM
19	DISPOFF
20	CL ₁
21	FR
22	MD

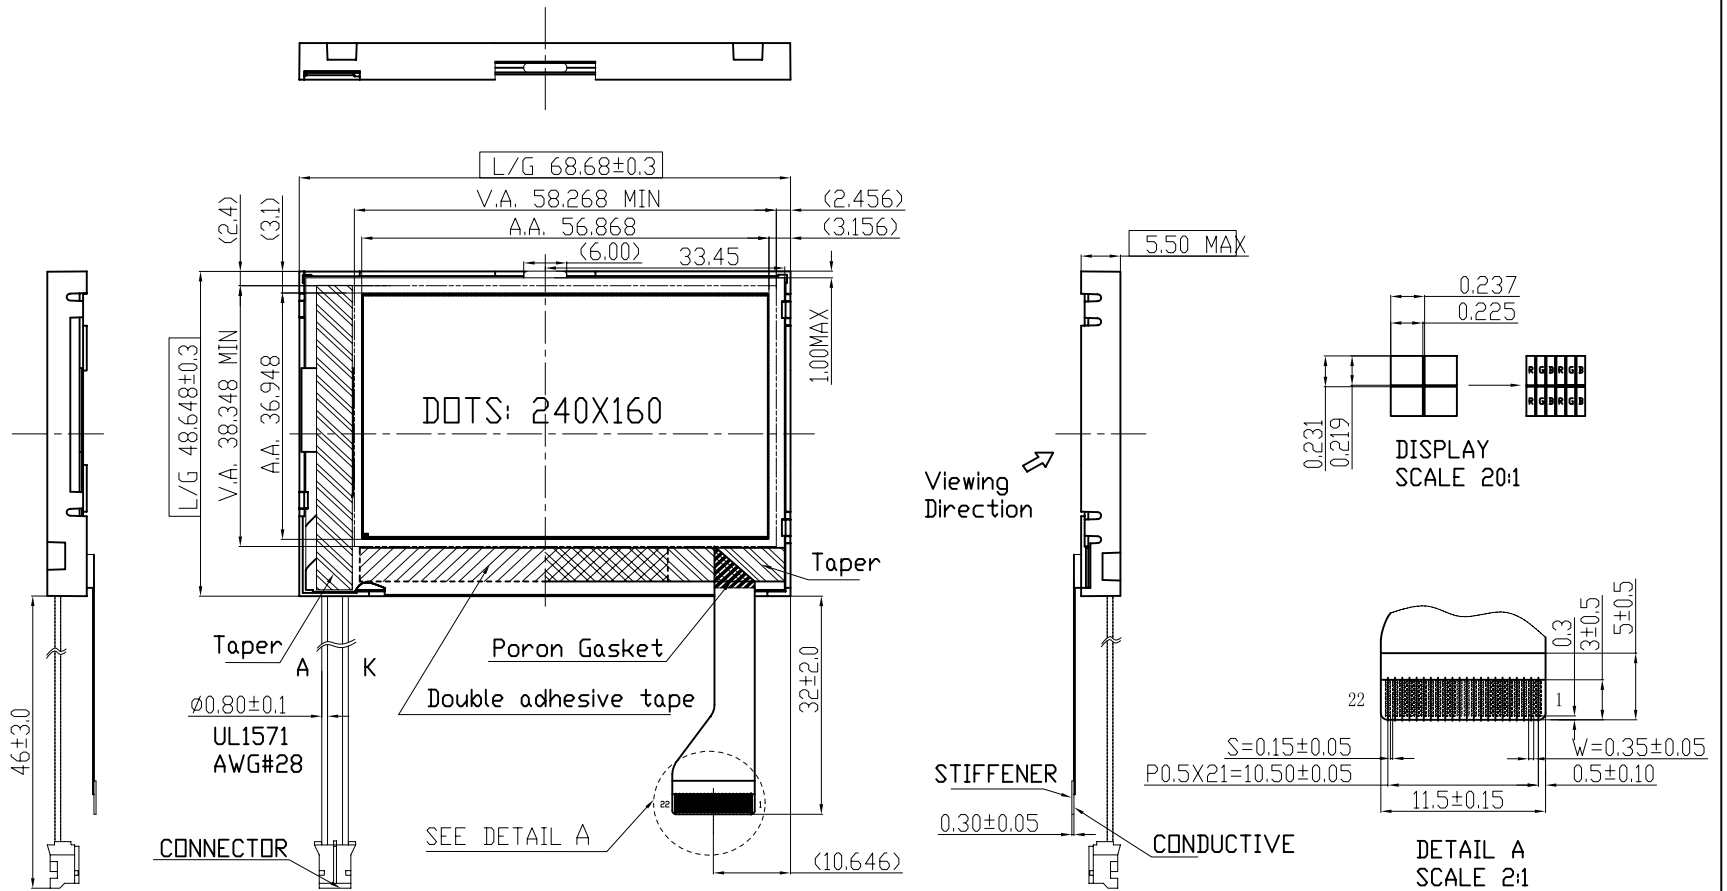

NOTES:

- | | |
|--|--|
| 1. DISPLAY TYPE: | CSTN |
| 2. VIEWING DIRECTION: | 12:00 |
| 3. POLARIZER MODE: | Transmissive/Negative |
| 4. DRIVE METHOD: | 1/160 DUTY 1/13 BIAS |
| 5. LCD OPERATING VOLTAGE: | 18V |
| 6. LOGIC SUPPLY VOLTAGE: | 3.0V |
| 7. OPERATING TEMP.: | -10°C~+60°C |
| 8. STORAGE TEMP.: | -20°C~+70°C |
| 9. LCD DRIVER: | ST8016S(CDM)+ST8024S(SEG) |
| 10. BACKLIGHT: | LED (WHITE,10.5V,20mA(TYP)) |
| 11. CONNECTOR: | FPC |
| 12. UNMARKED TOLERANCE: | MECHANIC TOL ±0.3mm |
| 13. THE CONTROLLED DIMENSIONS MASK TO BE | |