




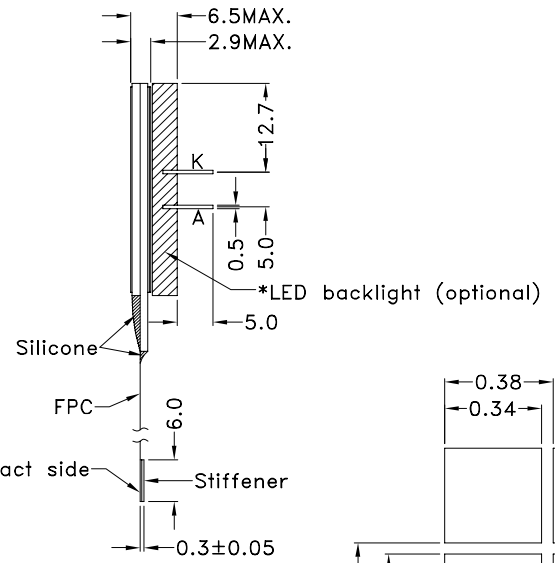

MARK	REASON	PREPARED	DATE
⚠			
⚠			
⚠			
⚠			

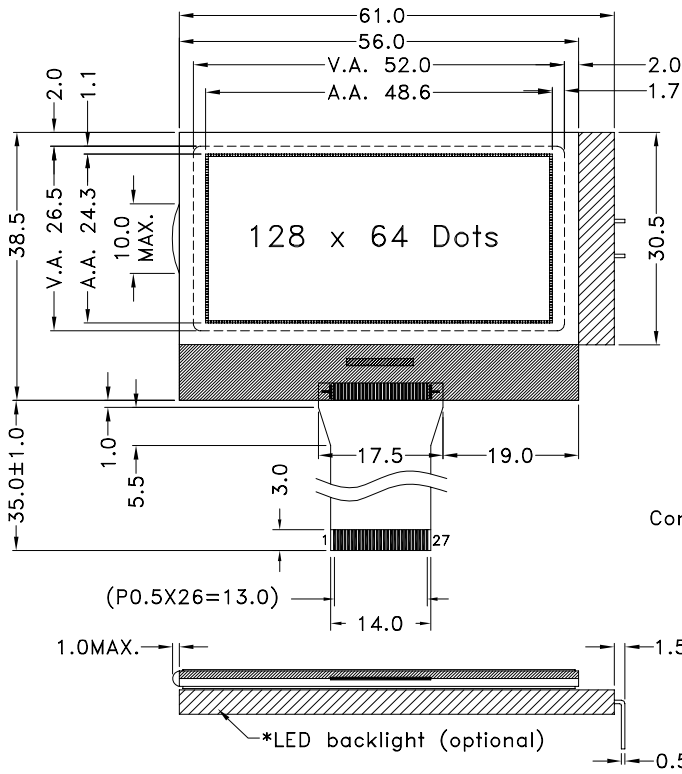

TOLERANCE IF NOT SPECIFY ±0.5mm		SCALE NOT ON SCALE	UNIT IN mm	MULTI-INNO TECHNOLOGY CO.,LTD.		SHEET 1 OF 3	
REV.	REVISION RECORD	DATE	CUSTOMER	APPROVED	MODEL NO. MI12864H-G-5		
00	1st ISSUE	06.06.01	STANDARD		TITLE: DIMENSION		
			AGENT	APPROVED	DRAWN BY: X.L	DATE :06.06.01	
			CUSTOMER REF.	OUR REF. ZX90907X	CHECKED BY :	DATE :	
					APPROVED BY :	DATE :	

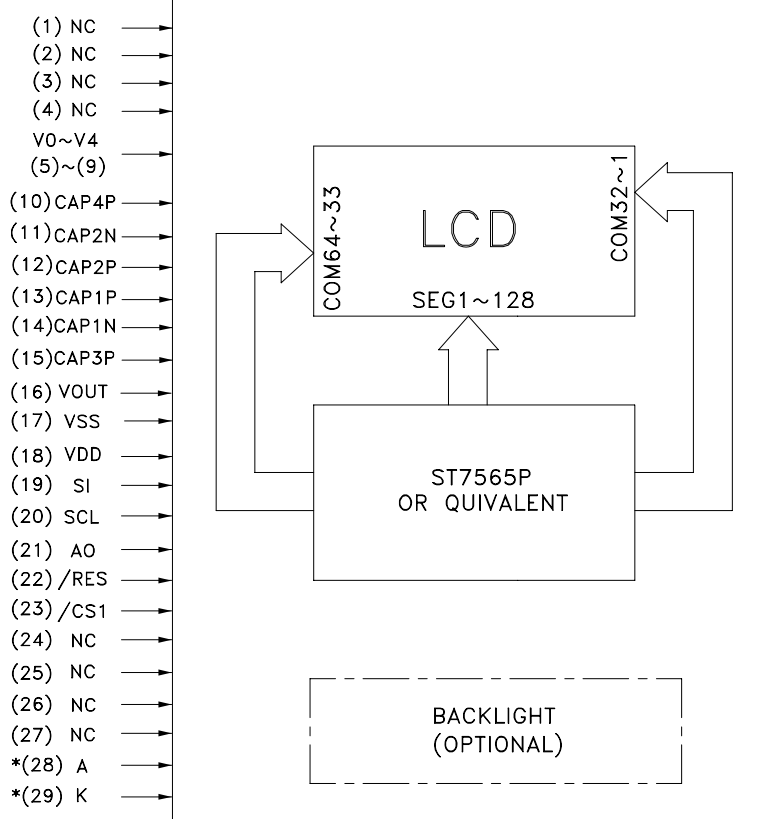

PIN NUMBER	SYMBOL	FUNCTION
1	NC	NO connection
2	NC	
3	NC	
4	NC	
5	V0	Supply voltage for LCD
6	V1	
7	V2	
8	V3	
9	V4	DC/DC voltage converter terminal
10	CAP4P	
11	CAP2N	
12	CAP2P	
13	CAP1P	
14	CAP1N	
15	CAP3P	
16	VOUT	Operating voltage for LCD
17	VSS	Ground(0V)
18	VDD	Supply voltage for logic
19	SI	Serial data Input
20	SCL	Serial clock Input
21	AO	Data control signal
22	/RES	Reset
23	/CS1	Chip select signal
24	NC	No connection
25	NC	
26	NC	
27	NC	
28	A	Voltage supply for backlight (VE+)
29	K	Voltage supply for backlight (VE-)

TOLERANCE IF NOT SPECIFY ±0.5mm		SCALE NOT ON SCALE	UNIT IN mm	MULTI-INNO TECHNOLOGY CO.,LTD.		SHEET 2 OF 3	
REV.	REVISION RECORD	DATE	CUSTOMER	APPROVED	MODEL NO. MI12864H-G-5		
00	1st ISSUE	06.06.01	STANDARD		TITLE: PINOUT & BLOCK DIAGRAM		
			AGENT	APPROVED	DRAWN BY: X.L	DATE :06.06.01	
			CUSTOMER REF.	OUR REF. ZX90907X	CHECKED BY :	DATE :	
					APPROVED BY :	DATE :	