



7		
6		
5	Shading Tape	1
4	Backlight	1
3	FPC	1
2	IC	1
1	LCD	1
NO	Part Name	Quantity

CUSTOMER APPROVAL:



Block Diagram:

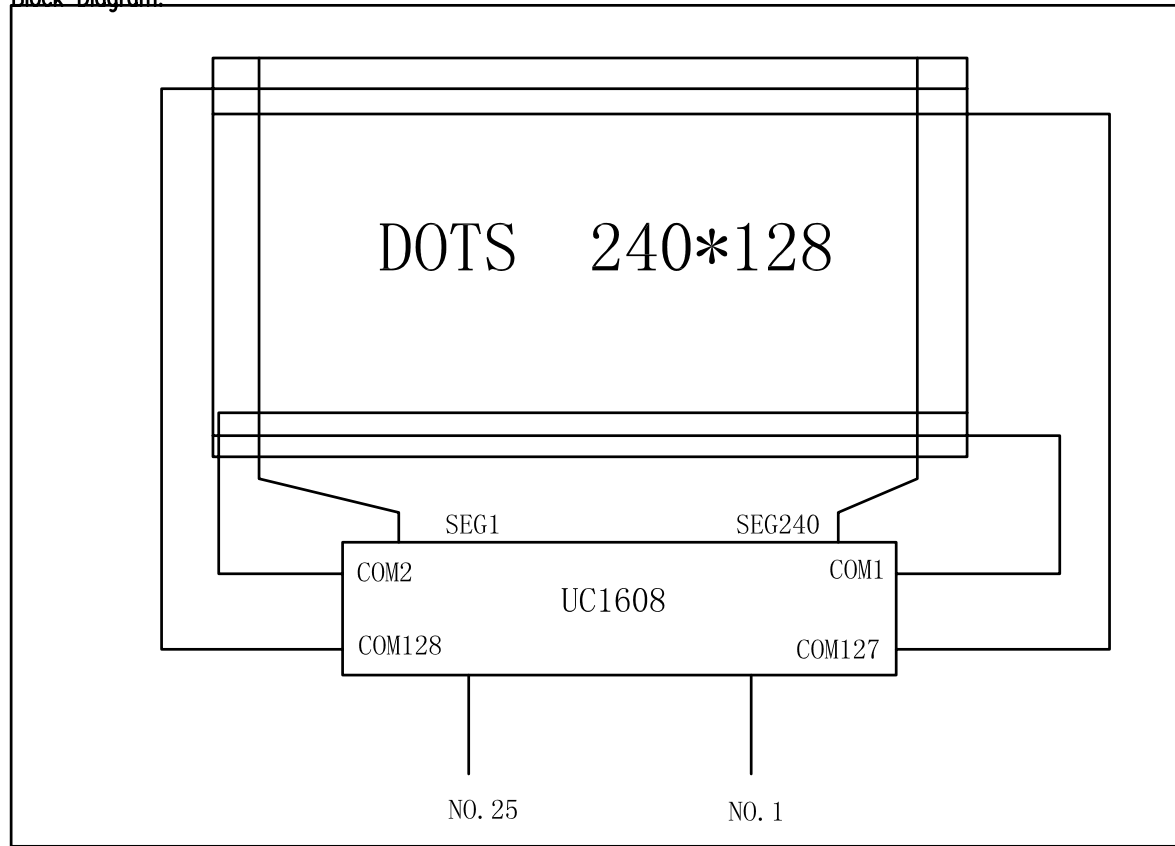

Pin Description:

PIN	Symbol
1	BM0
2	BM1
3	CS0
4	RST
5	CD
6	WR0
7	WR1
8	D0
9	D1
10	D2
11	D3
12	D4
13	D5
14	D6
15	D7
16	VDD
17	VDD
18	VSS
19	VSS
20	VBIAS
21	VLCD
22	VBO+
23	VBO-
24	VB1+
25	VB1-

DISPLAY TYPE: FFSTN, Transmissive, Negative  
 VIEWING DIRECTION: 6:00  
 DRIVER IC: UC1608U, 8-BIT/8080/6800 INTERFACE  
 LOGIC VOLTAGE: 3.0±0.3V  
 LCD DRIVE VOLTAGE(Vlcd): 15.0V  
 DRIVING METHOD: 1/128 DUTY, 1/12 BIAS  
 BACKLIGHT: White LED Backlight  
 OPERATING TEMPRATURE: -20° ~ +70° C  
 STORAGE TEMPRATURE: -30° ~ +80° C  
 INTERFACE CONNECTOR: FPC  
 ALL UNMARKED TOLERANCE: ±0.3mm

A02: Change the FPC Outline
A01: Revised The Module Outline
A00: Original Edition
Revision History:

CUSTOMER APPROVAL:

DRAWN:

翁沛根  
2008-12-08

CHECKED:

APPROVED:

LCM NO: MI240128H-G

Rev: 02

UNITS: mm

DWG NO:

SHEET 2 OF 2

