




VERSION	DESCRIPTION	DATE

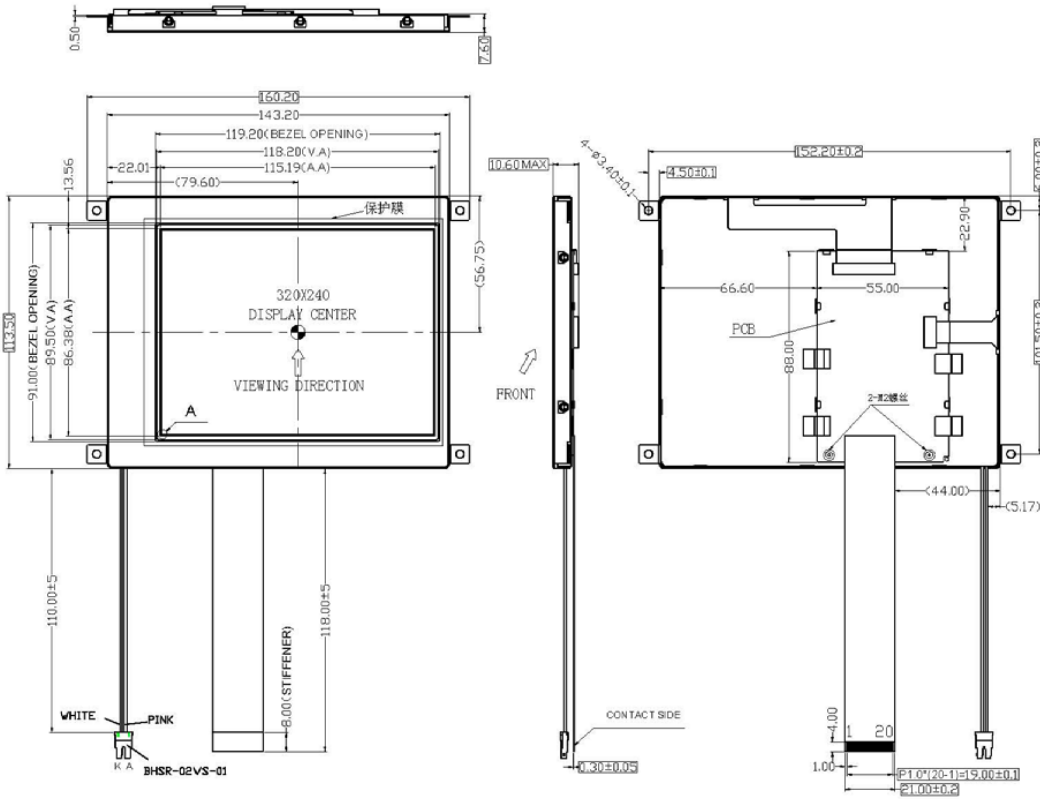

PIN ASSIGNMENT:

1	GND	12	D5
2	VDD	13	D6
3	VADJ	14	D7
4	RS	15	CS
5	WR	16	RST
6	RD	17	VEE
7	D0	18	NC
8	D1	19	NC
9	D2	20	NC
10	D3		
11	D4		

NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00(WIDE VIEWING DIRECTION)
3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
4. LCD OPERATING VOLTAGE: 21.6V, LOGIC VOLTAGE: 5.0V
5. DRIVE METHOD: 1/240 DUTY 1/14 BIAS
6. OPERATING TEMP.: -20° C+70° C
7. STORAGE TEMP.: -30° C+80° C
8. Controller: RA8806 Driver: NT7701 (SBC)+NT7702 (COM)
9. BACKLIGHT: LEDS(WHITE 10V 60mA(TYP) )
10. BEZEL MATERIAL IS SUS430
11. UNMARKED TOLERANCES: ±0.3
12. CONTROLLED DIMENSION MASK
13. REFERENCE DIMENSION MASK ( )
14. INCLUDING DC-DC AND TEMPERATURE COMPENSATE CIRCUIT
15. REQUIREMENTS FOR ENVIRONMENTAL PROTECTION: ROHS

MULTI-INNO TECHNOLOGY CO.,LTD

DRAWN BY:	TITLE: MI320240C-G	
CHECKED BY:	DWG NO: G-1	SCALE:
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:		SHEET NO: 1 OF 1