


SECTION: A-A

CON1

PIN NO	P1	P2	P3	P4	P5	P6	P7	P8	P9-P16	P17	P18	P19	P20
SYMBOL	VSS	VDD	V0	/WR	/RD	/CS	A0	/RES	00-07	NC	VOUT	LED+	LED-

BLOCK DIAGRAM

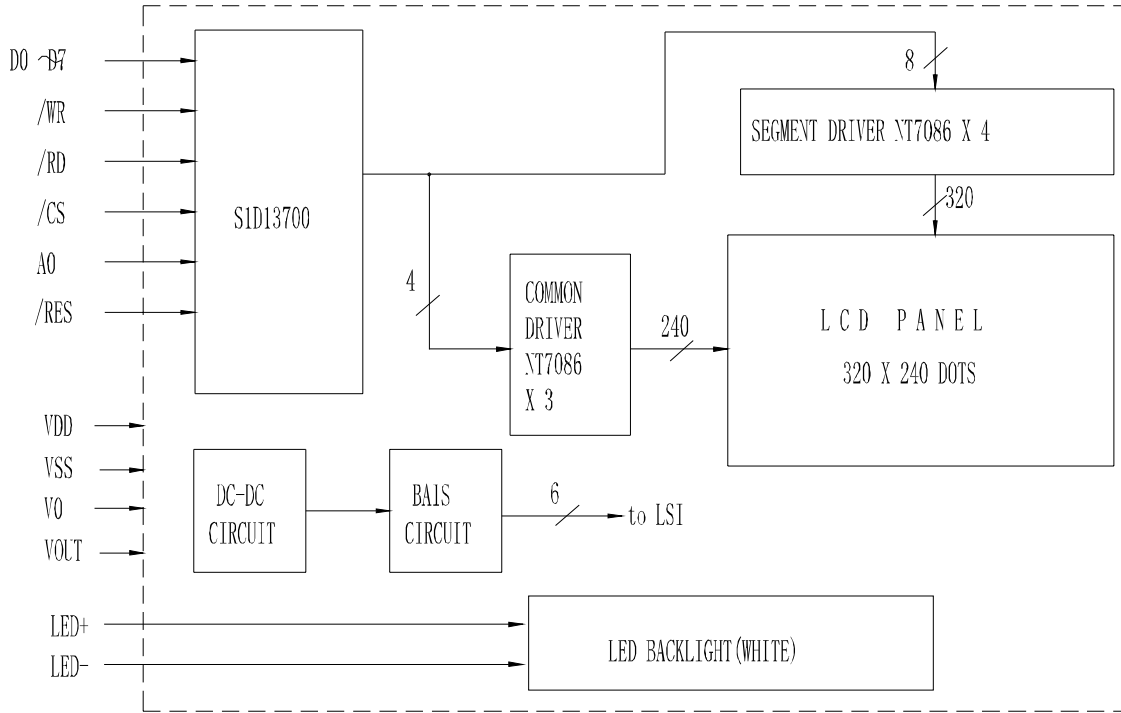

- NOTES:
1. OPERATING TEMPERATURE: -20°C TO 70°C
STORAGE TEMPERATURE: -30°C TO 80°C
 2. LCD MODEL: FSTN/POSITIVE/TRANSFLECTIVE/6:00
 3. 1/240 DUTY, 1/17 BIAS, VLCD=25V, VDD=5V
 4. BACKLIGHT: WHITE LED, IF=140mA VF=5V
 5. ROHS COMPLIANT