




MODULE NO.: MI320240I-1

Ver 1.0

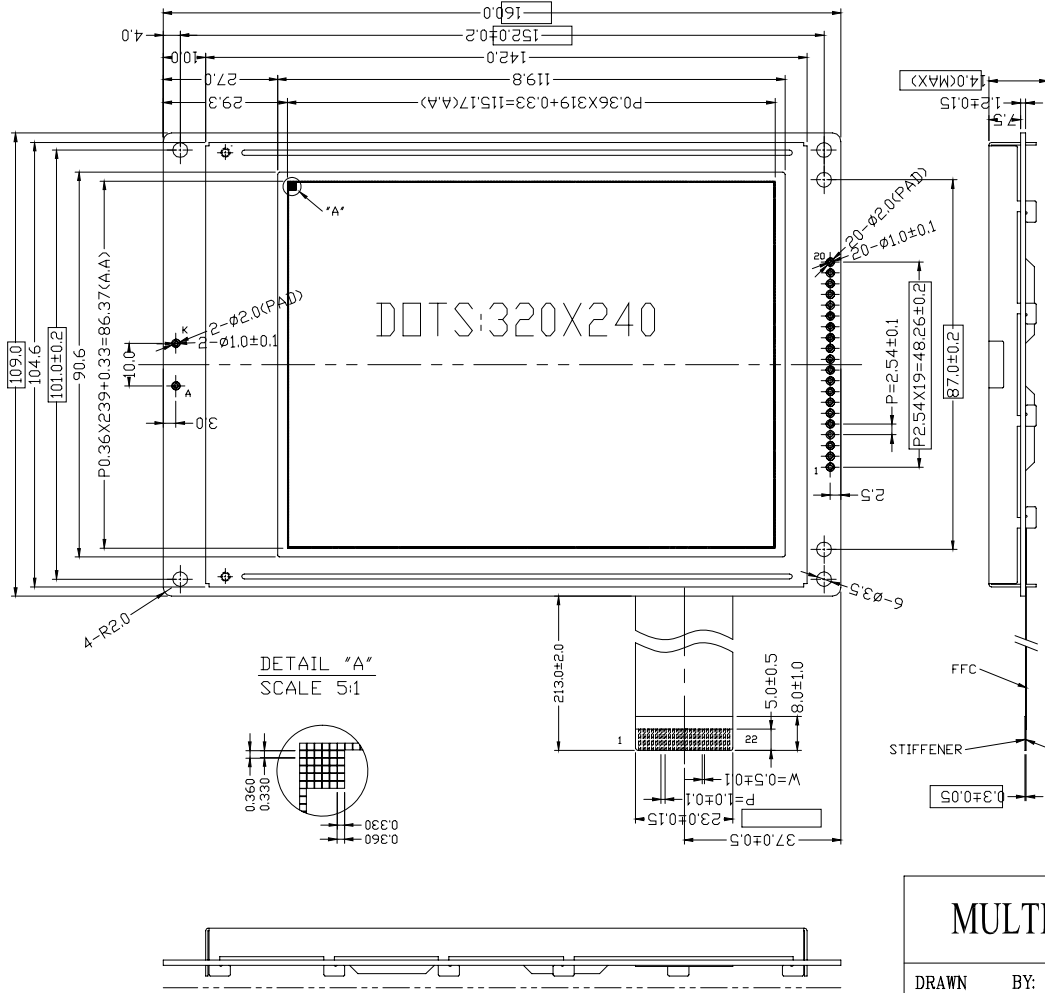


PIN ASSIGNMENT:

1	VSS	12	D5
2	VDD	13	D6
3	V0	14	D7
4	A0	15	/CS
5	R/W	16	/RET
6	E	17	VEE
7	D0	18	SEL1
8	D1	19	A
9	D2	20	K
10	D3	21	CN
11	D4	22	CN

NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00(WIDE VIEWING DIRECTION)
3. POLARIZER MODE: TRANSLLECTIVE/POSITIVE
4. LCD OPERATING VOLTAGE: 22.6V, LOGIC VOLTAGE: 5.0V
5. DRIVE METHOD: 1/240 DUTY 1/16 BIAS
6. OPERATING TEMP.: -20°C~+70°C
7. STORAGE TEMP.: -30°C~+80°C
8. DRIVERS: S1D13700
9. BACKLIGHT: LED(WHITE 4.0V 150mA(TYPE) 200mA(MAX))
10. BEZEL MATERIAL IS SUS430
11. UNMARKED TOLERANCES: ±0.3mm
12. THE CONTROLLED DIMENSIONS MASK TO BE
13. REQUIREMENTS FOR ENVIRONMENTAL PROTECTION: ROHS
14. INCLUDING DC-DC AND TEMPERATURE COMPENSATE CIRCUIT

DETAIL "A"  
SCALE 5:1



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	MI320240I-1	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:		UNIT: mm
CONFIRMED BY:	DWG NAME:	SHEET NO: 1 OF 1