Customer No.:

External dimensions

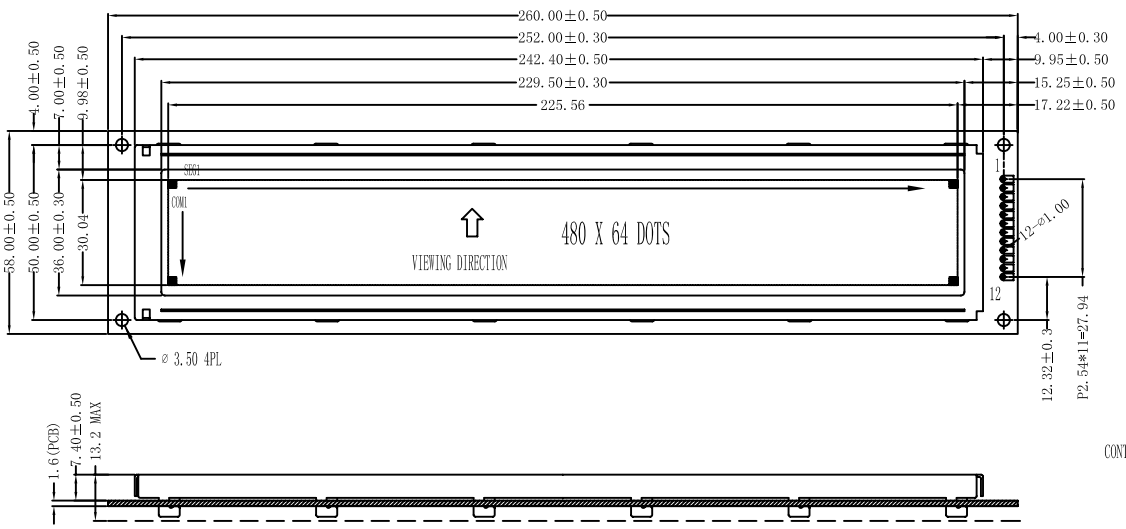

1	2	3	4	5	6	7	8	9	10	11	12
D	FLM	M	CL1	CL2	NC	VDD	VSS	VEE	VO	SLA	SLK

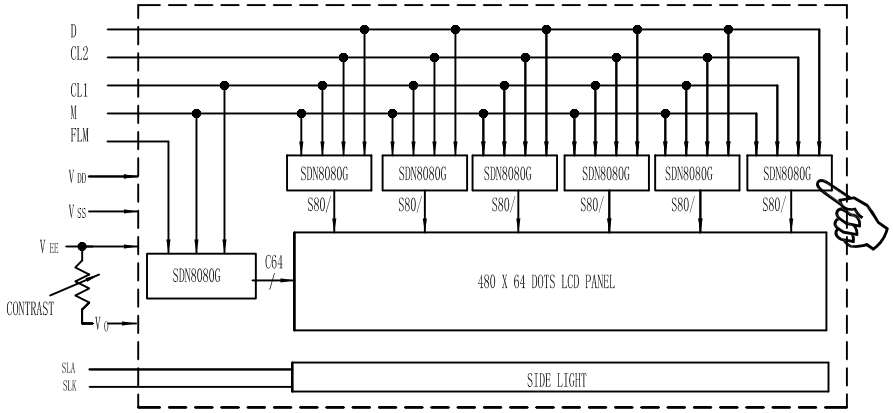

NOTES:

1: OPERATING TEMPERATURE: -20° C TO 70° C
STORAGE TEMPERATURE: -30° C TO 80° C

2. LCD MODEL:.FSTN/POSITIVE/TRANSMISSIVE
3. DUTY=1/64, BAIS=1/9,VDD=5V,Vlcd=13.2V
4. BACKLIGHT: YELLOW-GREEN LED,Vf=3.8~4.8V,If=570mA
5. RoHS Compliant



DOTS DETAIL

1.LED CIRCUIT DIAGRAM:
(LED 1x38x2=76 Dies) Color: YELLOW-GREEN



NO.	NAME	QTY	Part No.	VENDER && NOTE

CUSTOMER APPROVE		AMEND			MULTI-INNO TECHNOLOGY CO.,LTD.		
Mechanical	Electrical			TOLERANCE: DECIMAL .x ± .50 .xx ± .30 ∠ ± 1/4°	PRODUCT NO. MI48064C-3	DRAW NO.	REV A
					DWN 郑瑞建	DSN 郑瑞建	
					CHKD	APPD 黄英群	
					NOT IN SCALE	UNIT mm	SHEET: 1/1
		A	MODIFY IC	20090318			
		NO.	CONTENT	DATE			