Customer No.:

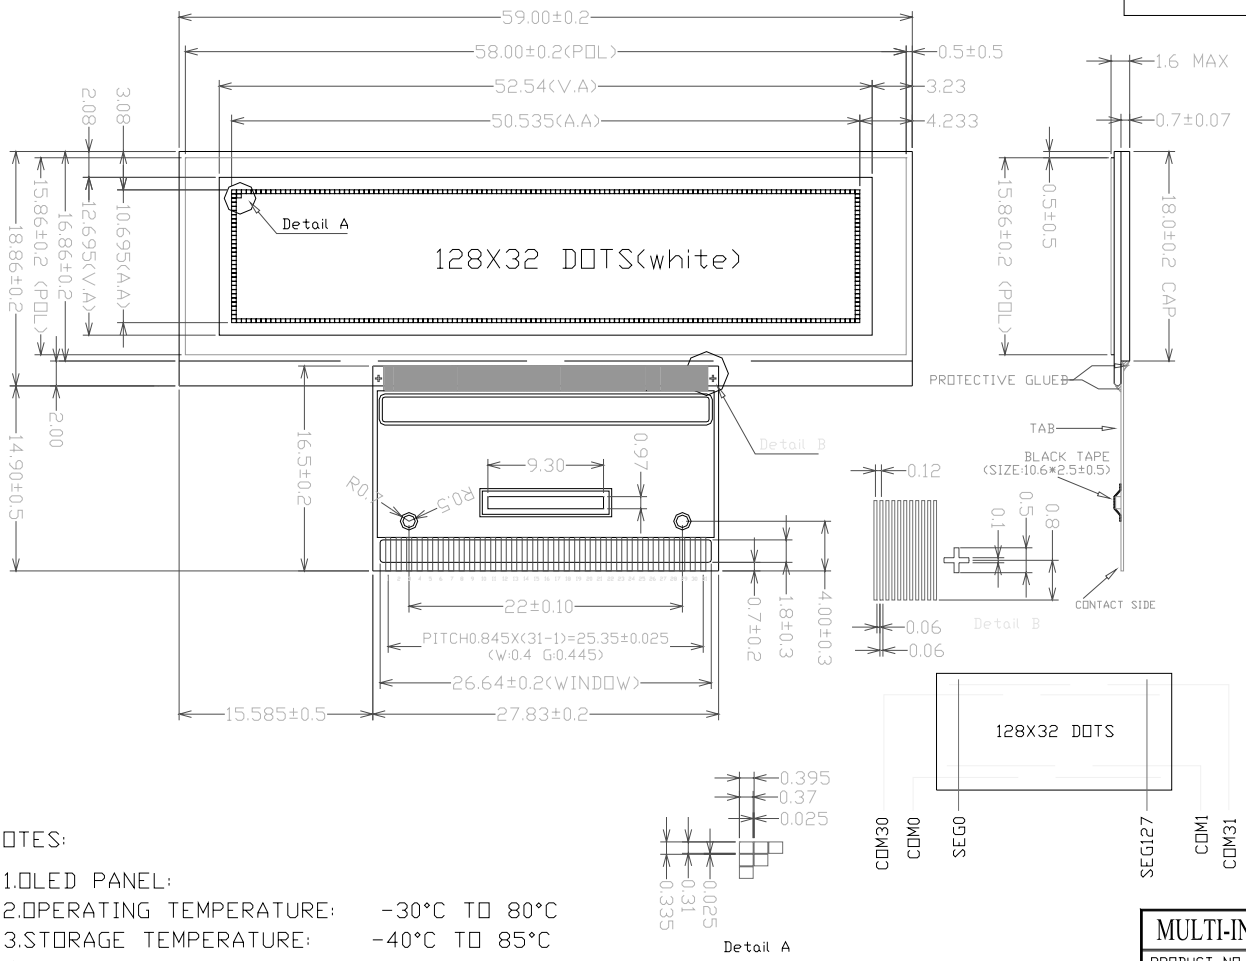

PIN DESCRIPTION

Pin No.	Designation
1	NC
2	Vpp
3	Vcomh
4	Iref
5	D7
6	D6
7	D5
8	D4
9	D3
10	D2
11	D1
12	D0
13	$\overline{RD}$
14	$\overline{WR}$
15	A0
16	$\overline{RES}$
17	$\overline{CS}$
18	NC
19	P/S
20	C86
21	Vdd1
22	NC
23	NC
24	NC
25	Vbref
26	SENSE
27	FB
28	Vdd2
29	SW
30	Vss
31	NC

NOTES:

1. OLED PANEL:
2. OPERATING TEMPERATURE: -30°C TO 80°C
3. STORAGE TEMPERATURE: -40°C TO 85°C
4. DRIVER IC: SH1101B (TCP)
5. GENERAL TOLERANCE:±0.2

NOTE:THE SIZE OF GLASS HAS BEEN MODIFIED ON 20061009

MULTI-INNO TECHNOLOGY CO.,LTD.			
PRODUCT NO. MI12832BO		DRAW NO. OLED076	REV B
DWN /20070712		DSN /20070712	
CHKD /20070712		APPD /20070712	
NOT IN SCALE	UNIT mm	SHEET: 1/1	