




Customer No. :

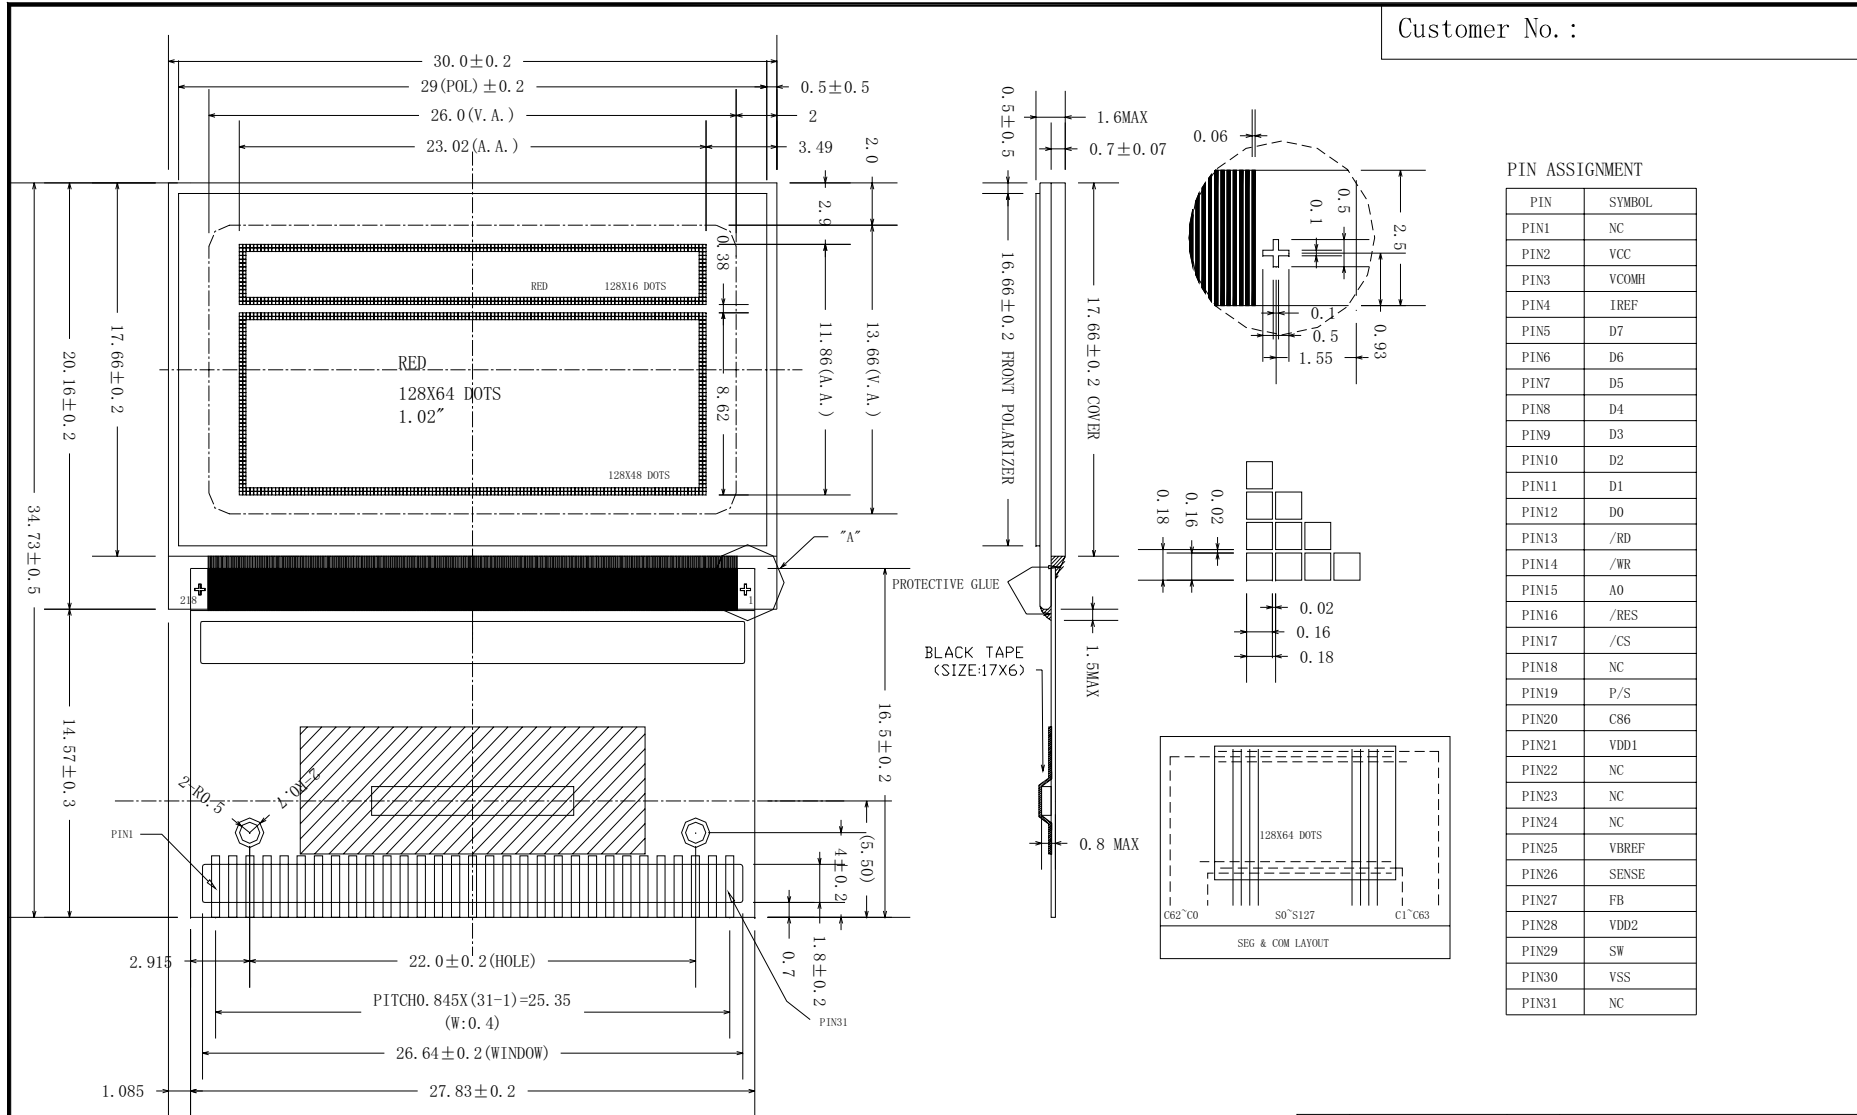

PIN ASSIGNMENT

PIN	SYMBOL
PIN1	NC
PIN2	VCC
PIN3	VCOMH
PIN4	IREF
PIN5	D7
PIN6	D6
PIN7	D5
PIN8	D4
PIN9	D3
PIN10	D2
PIN11	D1
PIN12	DO
PIN13	/RD
PIN14	/WR
PIN15	A0
PIN16	/RES
PIN17	/CS
PIN18	NC
PIN19	P/S
PIN20	C86
PIN21	VDD1
PIN22	NC
PIN23	NC
PIN24	NC
PIN25	VBREF
PIN26	SENSE
PIN27	FB
PIN28	VDD2
PIN29	SW
PIN30	VSS
PIN31	NC

NOTES:

1. GENERAL TOLERANCE : ±0.2MM
2. OPERATING TEMPERATURE: -20° C TO 70° C
3. STORAGE TEMPERATURE: -30° C TO 80° C
4. DRIVE IC : SH1101

CUSTOMER APPROVE		AMEND		NO.	NAME	QTY	Part No.		
Mechanical	Electrical	△		1/64	DUTY		MULTI-INNO TECHNOLOGY CO.,LTD.		
		△		/	BIAS		PRODUCT NO.	DRAW NO.	REV
		△		/	Vop		MI12864BO	OLED040	A
		⚠		/	VDD		DWN	DSN	
		NO.	CONTENT	DATE	/	0° CLOCK	CHKD	APPD	
							NOT IN SCALE	UNIT mm	SHEET: 3/3