




Customer No.:

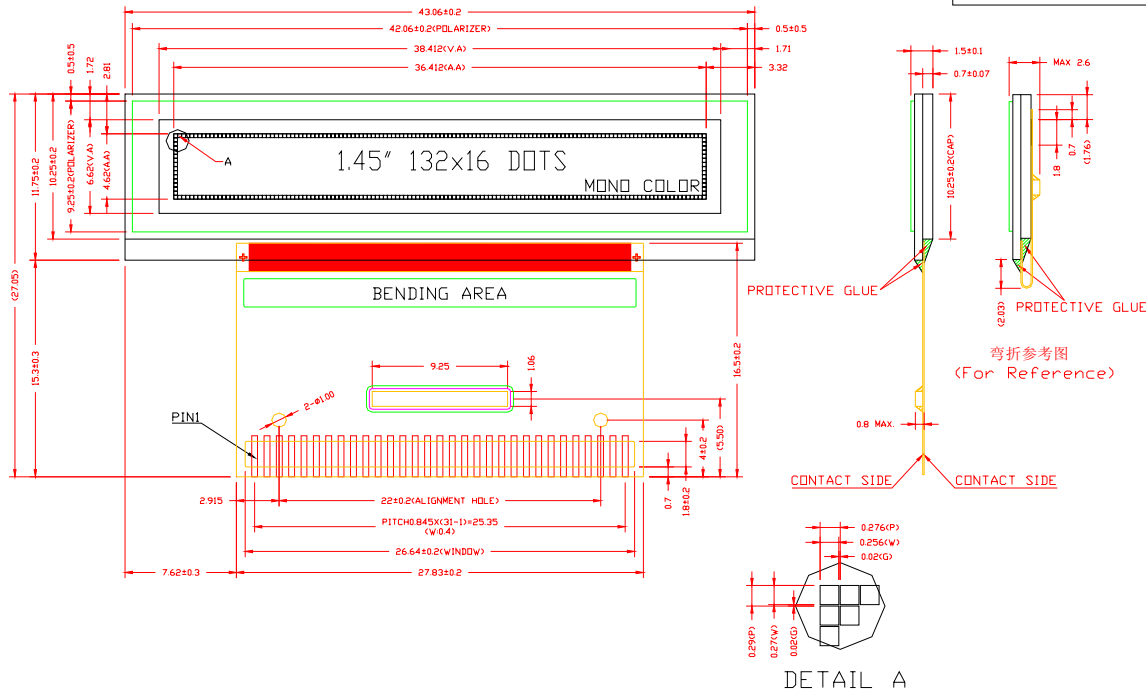

PIN ASSIGNMENT

| PIN | SYMBOL |
|-------|--------|
| PIN1 | NC |
| PIN2 | VCC |
| PIN3 | VCOMH |
| PIN4 | IREF |
| PIN5 | D7 |
| PIN6 | D6 |
| PIN7 | D5 |
| PIN8 | D4 |
| PIN9 | D3 |
| PIN10 | D2 |
| PIN11 | D1 |
| PIN12 | D0 |
| PIN13 | /RD |
| PIN14 | /WR |
| PIN15 | A0 |
| PIN16 | /RES |
| PIN17 | /CS |
| PIN18 | NC |
| PIN19 | P/S |
| PIN20 | CB6 |
| PIN21 | VDD1 |
| PIN22 | NC |
| PIN23 | NC |
| PIN24 | NC |
| PIN25 | VBREF |
| PIN26 | SENSE |
| PIN27 | FB |
| PIN28 | VDD2 |
| PIN29 | SW |
| PIN30 | VSS |
| PIN31 | NC |

NOTES:

1. OPERATING TEMPERATURE: -20°C TO 70°C
2. STORAGE TEMPERATURE: -30°C TO 80°C
3. DRIVE IC :SH1101A
4. GENERAL TOLERANCE: ±0.2
5. ROHS COMPLIANCY

| CUSTOMER APPROVE | | AMEND | | NO. | NAME | QTY | Part No. | |
|------------------|------------|-------|------------------------|----------|------|--------|--------------------------------|-------------------|
| Mechanical | Electrical | | | 1/64 | DUTY | | MULTI-INNO TECHNOLOGY CO.,LTD. | |
| | | △ | MODIFY TOTAL THICKNESS | 20080722 | / | BIAS | PRODUCT NO. | DRAW NO. |
| | | △ | CHANGE IC | 20080610 | / | Vop | MI13216AO | OLED112 |
| | | △ | ADD ROHS COMPLIANCY | 20071128 | / | VDD | DWN 杨学宇 20080722 | DSN 杨学宇 20080722 |
| | | NO. | CONTENT | DATE | / | OCLOCK | CHKD 谢志生 20080722 | APPD 苏君海 20080722 |