MODULE NO.: MI9664BO Ver 0.0

Customer No.:

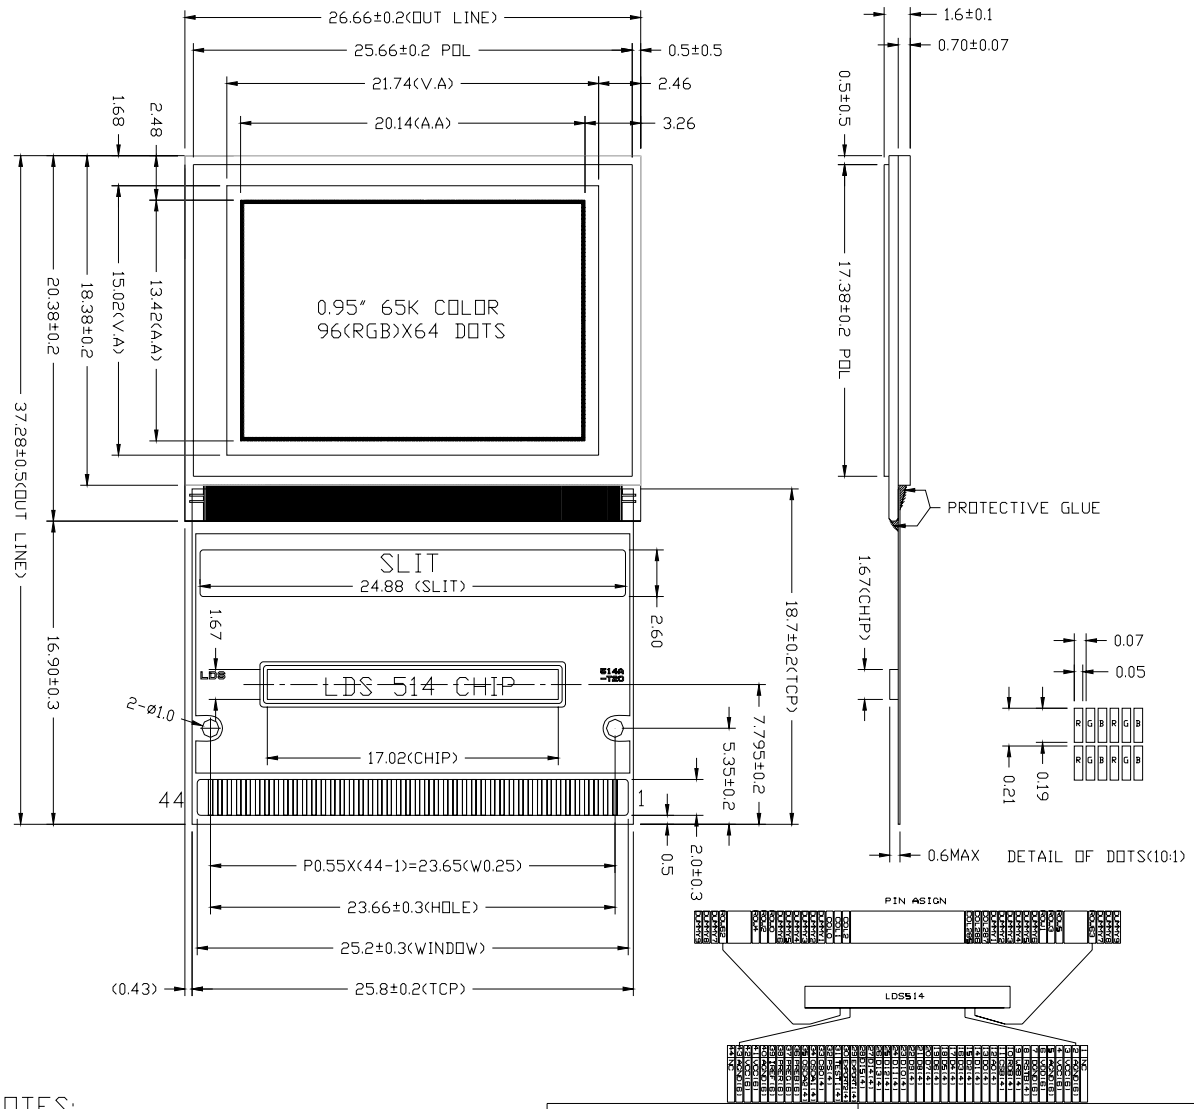

PIN DESCRIPTION

PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	NC	19	D6(4)	37	PREG(6)
2	AGND(6)	20	D7(4)	38	PRER(6)
3	VCC(6)	21	D8(4)	39	IREF(6)
4	VCC(6)	22	D9(4)	40	AGND(6)
5	AGND(6)	23	D10(4)	41	VCC(6)
6	VDD(6)	24	D11(4)	42	VCC(6)
7	DGND(6)	25	D12(4)	43	AGND(6)
8	RSTB(4)	26	D13(4)	44	NC
9	WRB(4)	27	D14(4)		
10	RDB(4)	28	D15(4)		
11	CSB(4)	29	EXPORT1(4)		
12	A0(4)	30	EXPORT2(4)		
13	D0(4)	31	TEST1		
14	D1(4)	32	PS(4)		
15	D2(4)	33	C80(4)		
16	D3(4)	34	OSCA1(4)		
17	D4(4)	35	OSCA2(4)		
18	D5(4)	36	PREB(6)		

NOTES:

1. OPERATING TEMPERATURE: -20°C TO 70°C
2. STORAGE TEMPERATURE: -30°C TO 80°C
3. TCP DRIVER: LDS514
4. GENERAL TOLERANCE : ±0.2MM
5. ROHS COMPLIANCY

NO.	NAME	QTY	Part No.

CUSTOMER APPROVE		AMEND			OLED	MULTI-INNO TECHNOLOGY CO.,LTD.		
Mechanical	Electrical	△			1/64 DUTY	PRODUCT NO.	DRAW NO.	REV
		△			/ BIAS	MI9664BO	OLED036	B
		△			/ Vop	DWN 杨学宇 20071128	DSN 黎洪由 20071128	
		△B	ADD ROHS COMPLIANCY	20071128	/ VDD	CHKD 谢志生 20071128	APPD 苏君海 20071128	
		NO.	CONTENT	DATE	/ DCLOCK	NOT IN SCALE	UNIT mm	SHEET: 3/3