



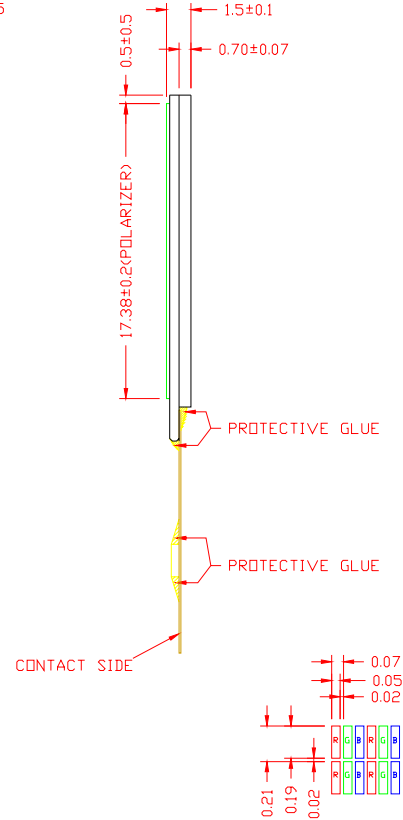

Customer No.:

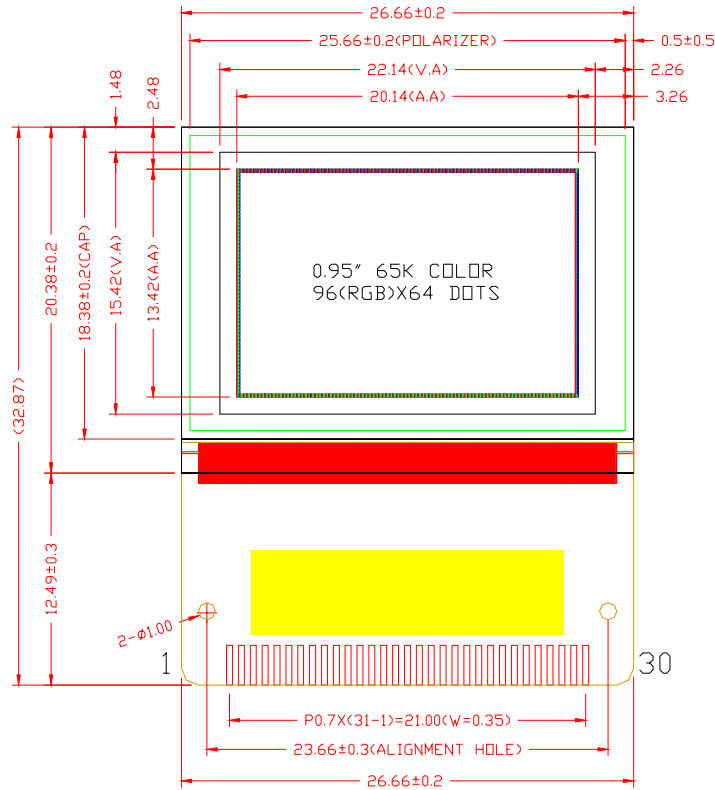

PIN DESCRIPTION

PIN	SYMBOL	PIN	SYMBOL
1	NC	17	CS#
2	VCC	18	IREF
3	VCOMH	19	BS2
4	NC	20	BS1
5	D7	21	VDD
6	D6	22	VP_C
7	D5	23	VP_B
8	D4	24	VP_A
9	D3	25	VBREF
10	D2	26	RESE
11	D1	27	FB
12	D0	28	VDDB
13	E(RD)	29	GDR
14	RW#(CWR)	30	VSS
15	DC#	31	NC
16	RES#		

DETAIL OF DOTS<10:1>

NOTES:

- 1.OPERATING TEMPERATURE: -20°C TO 70°C
- 2.STORAGE TEMPERATURE: -30°C TO 80°C
- 3.TCP DRIVER: SSD1332
- 4.GENERAL TOLERANCE : ±0.2MM
- 5.RDHS COMPLIANCY

NO.	NAME	QTY	Part No.
CUSTOMER APPROVE			
Mechanical	Electrical	AMEND	MULTI-INNO TECHNOLOGY CO.,LTD.
		1/64 DUTY	PRODUCT NO. MI9664CO
		// BIAS	DRAW NO. OLED178
		// Vop	REV B
		// VDD	DWN 杨学宇 20080624 DSN 杨学宇 20080624
		// O'CLOCK	CHKD 谢志生 20080624 APPD 苏君海 20080624
		NOT IN SCALE	UNIT mm SHEET: 1/1