
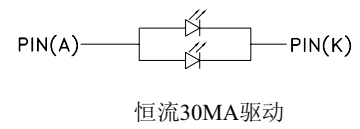


MAIN LCD DOTS DETAIL(20:1)



No:	PIN NAME
1	BL_A
2	BL_K
3	GND
4	ID
5	NC
6	/CSB
7	RESET
8	RS
9	/WRB
10	/RDB
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	GND
20	VDD

- NOTES:
- 1.DISPLAY TYPE: TFT-LCD
 - 2.VIEING DIRECTION: 6:00
 - 3.MAIN LCD DRIVE IC: IL19163
 - 4.POLARIZER MODE: TRANSMISSIVE/POSITIVE
 - 5.DRIVE METHOD: 1/160 DUTY
 - 6.VDD: 3.0V TYPICAL
 - 7.BACKLIGHT: WHITE LED-2CHIP(恒流30MA驱动)
 - 8.OPERATING TEMP: -20° C ~ 70° C
 - 9.STORAGE TEMP: -30° C ~ 80° C
 - 10.UNMARKED TOLERANCE: ± 0.20
 - 11.IMPORTANT DIMENSION:
 - 12.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

MULTI-INNO TECHNOLOGY CO.,LTD.

△	在背光源背面增加双面胶撕膜手柄	08.09.04	DRAWN BY:	TITLE: MI0177FT-1	
			CHECKED BY:	DWG NO: G-2	
REV	DESCRIPTION	DATE	APPROVED BY:	DWG NAME:	UNIT: mm
			CONFIRMED BY:	G-2	SHEET NO: 1 OF 1