





NO.	PIN NAME
1	DB0
2	DB1
3	DB2
4	DB3
5	GND
6	VCC
7	/CS
8	RS
9	/WR
10	/RD
11	TMO
12	NC(O/R)
13	NC(O/L)
14	NC(O/L)
15	NC(O/D)
16	LED-A
17	LED-K1
18	LED-K2
19	LED-K3
20	LED-K4
21	NC
22	DB4
23	DB5
24	DB9
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	/RESET
32	VCI
33	VCC
34	GND
35	DB5
36	DB6
37	DB7

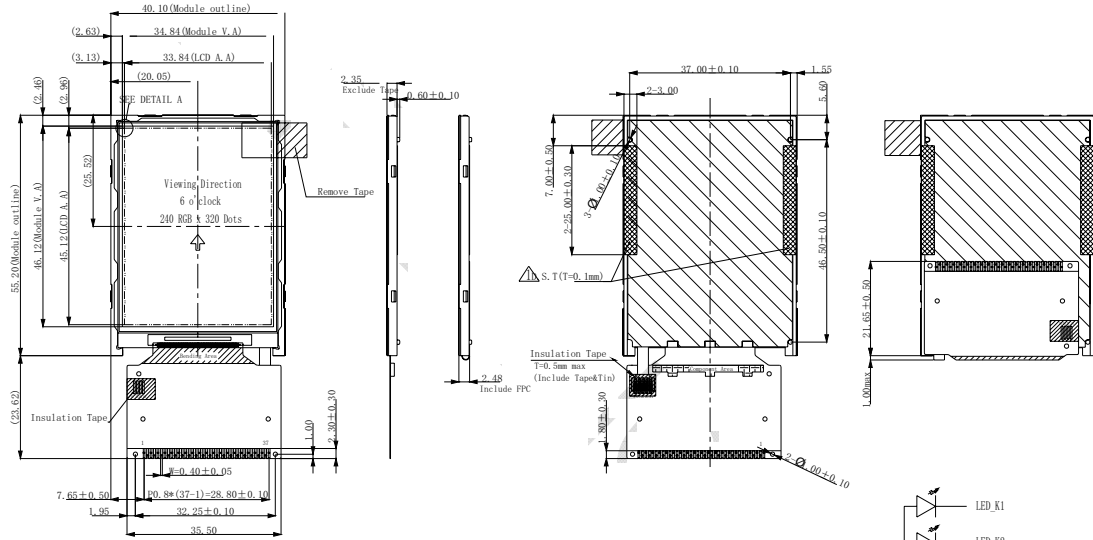

NOTES:

1. Display Type: a-si TFT
2. Gray Scale Inversion: 12 o'clock
3. Driver IC: ILI 9340
4. Backlight : 4 LED parallel
5. General Tolerance: ±0.2
6. Requirements on Environment Protection: Q/S0002
7. Recommended Case Open Area should be less than Module V.A

