




NO.	Symbol
1	NC
2	NC
3	NC
4	IM3
5	NC
6	RESET
7	VSYNC
8	HSYNC
9	DOTCLK
10	ENABLE
11	DB17
12	DB16
13	DB15
14	DB14
15	DB13
16	DB12
17	DB11
18	DB10
19	DB9
20	DB8
21	DB7
22	DB6
23	DB5
24	DB4
25	DB3
26	DB2
27	DB1
28	DB0
29	RD
30	WR
31	DC
32	CS
33	VSS
34	VCC
35	LED-
36	LED+



- NOTES:
1. Display Type: TFT
  2. Backlight: 4-chips LED
  3. Gray Scale Inversion: 12 o'clock;
  4. Driver IC: IL19340
  5. General Tolerance: ±0.2
  6. Operating Temperature: -20°C~70°C  
Storage Temperature: -30°C~80°C
  7. Requirements on Environment Protection: Q/S0002
  8. Suggest The Housing Aperture Dimensions (max) : 37.72x49.96mm

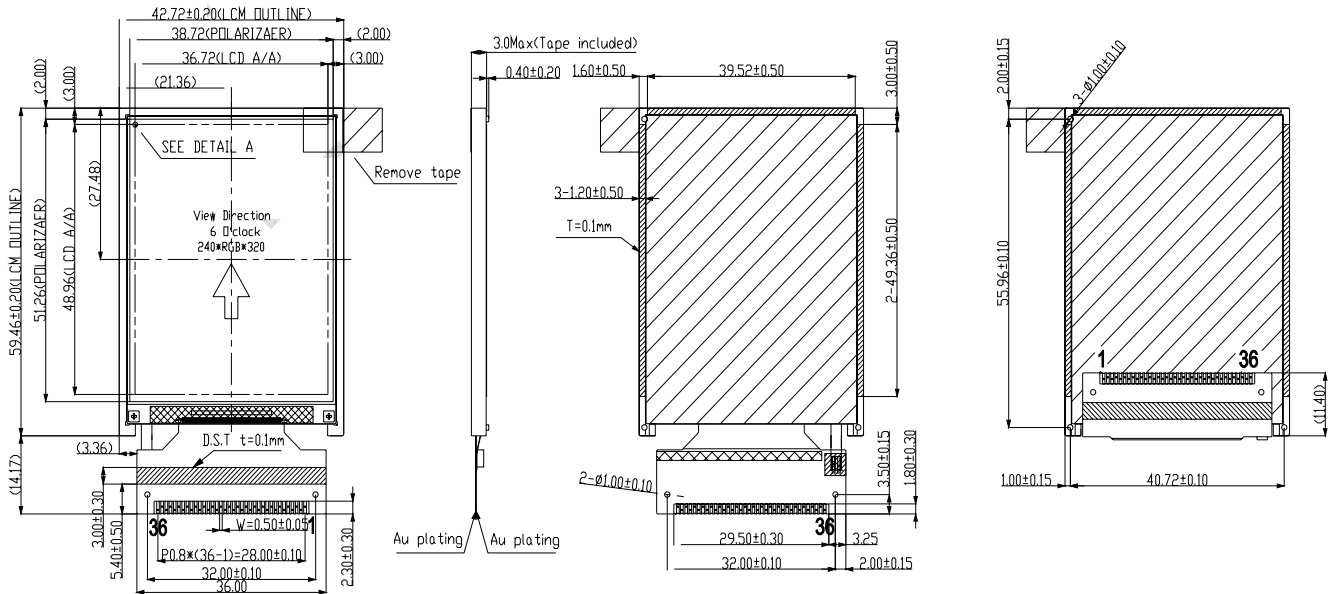