


FPC DEFINE

NO.	SYMBOL	NO.	SYMBOL
01	END	24	DB10
02	LE1K	25	DB9
03	LE1K	26	DB8
04	LE1A	27	DB7
05	LE1A	28	DB6
06	END	29	DB5
07	LE1PWN	30	DB4
08	IM0	31	DB3
09	IM1	32	DB2
10	IM2	33	DB1
11	IM3	34	DB0
12	FMARK	35	DBVCC
13	VSYNC	36	CS
14	VSYNC	37	RS
15	DOTCLK	38	MW/SCD
16	ENABLE	39	R9
17	DB17	40	RESET
18	DB16	41	S01
19	DB15	42	S00
20	DB14	43	VCC
21	DB13	44	VCI
22	DB12	45	END
23	DB11		

MATCHING CONNETTOR FH26-45S-0.3SHW(05)

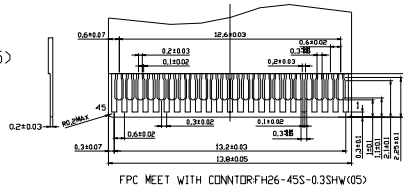

BL LED CIRCUIT DIAGRAM



NOTES:

- 1.DISPLAY TYPE:
Main LCD: Transmissive,12:00 O'CLOCK
 - 1.OPERATING TEMPERATURE: -20°C TO 70°C
 - 2.STORAGE TEMPERATURE: -30°C TO 80°C
 3. MAIN LCD DRIVER: IL19331
 4. ROHS COMPLIANCY
 - 5.MATCHING CONNETTOR :FH26-45S-0.3SHW(05)
- TOLERANCE OF SEGMENTS TO
EDGE OF GLASS: ±0.2MM