


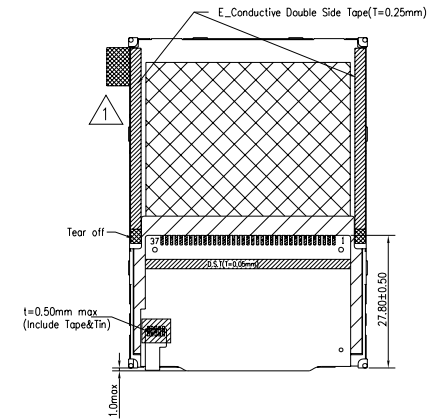
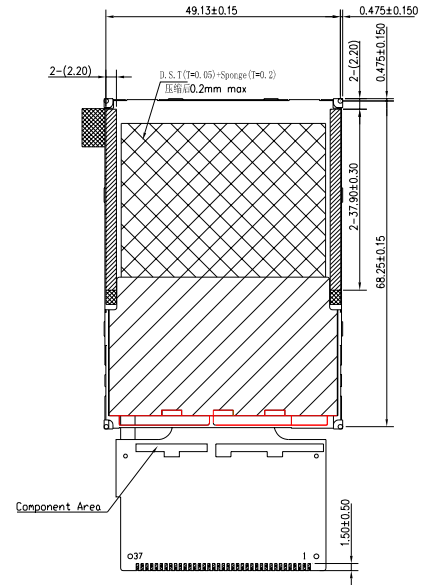
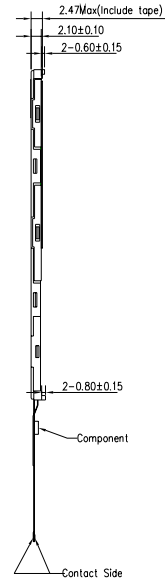


NO.	Symbol
1	IDVCC
2	VCC
3	GND
4	CS
5	S01
6	S00
7	SCL
8	GND
9	RESET
10	B0
11	B1
12	B2
13	B3
14	B4
15	B5
16	G0
17	G1
18	G2
19	G3
20	G4
21	G5
22	R0
23	R1
24	R2
25	R3
26	R4
27	R5
28	BUCLK
29	HSYNC
30	VSYNC
31	ENABLE
32	GND
33	LED-A
34	LED-K1
35	LED-K2
36	LED-K3
37	LED-K4

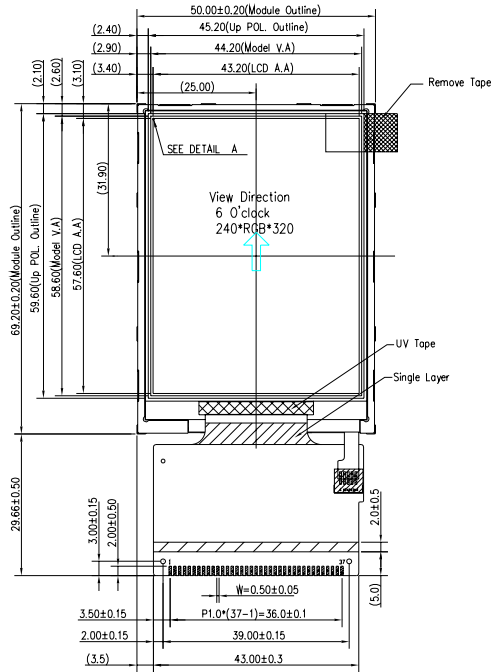

- NOTES:
1. Display Type: TFT
 2. Backlight: 4-chips LED
 3. Gray Scale Inversion: 12 o'clock;
 4. Driver IC: IL9336
 5. General Tolerance: ±0.2
 6. Requirements on Environment Protection: 0/S0002
 7. Recommended case open area should be less than Module V.A