
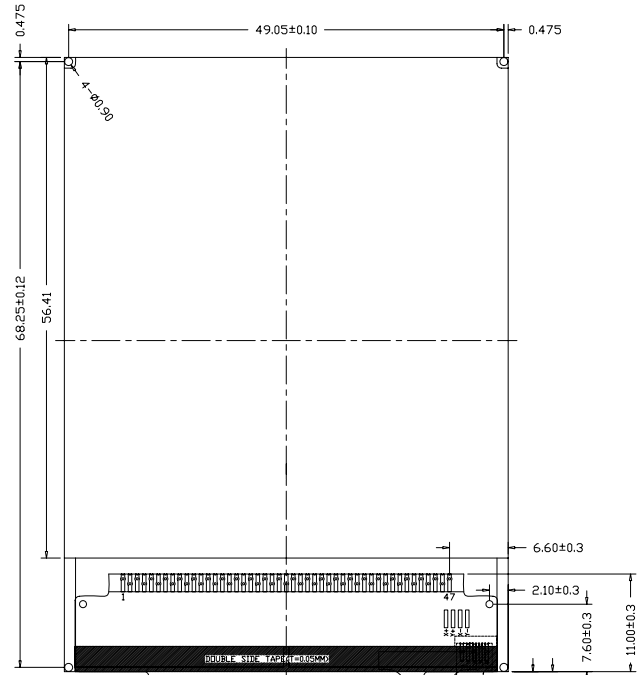
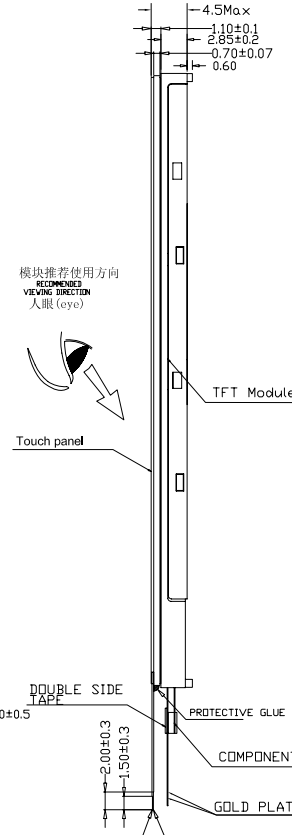


Customer No.:




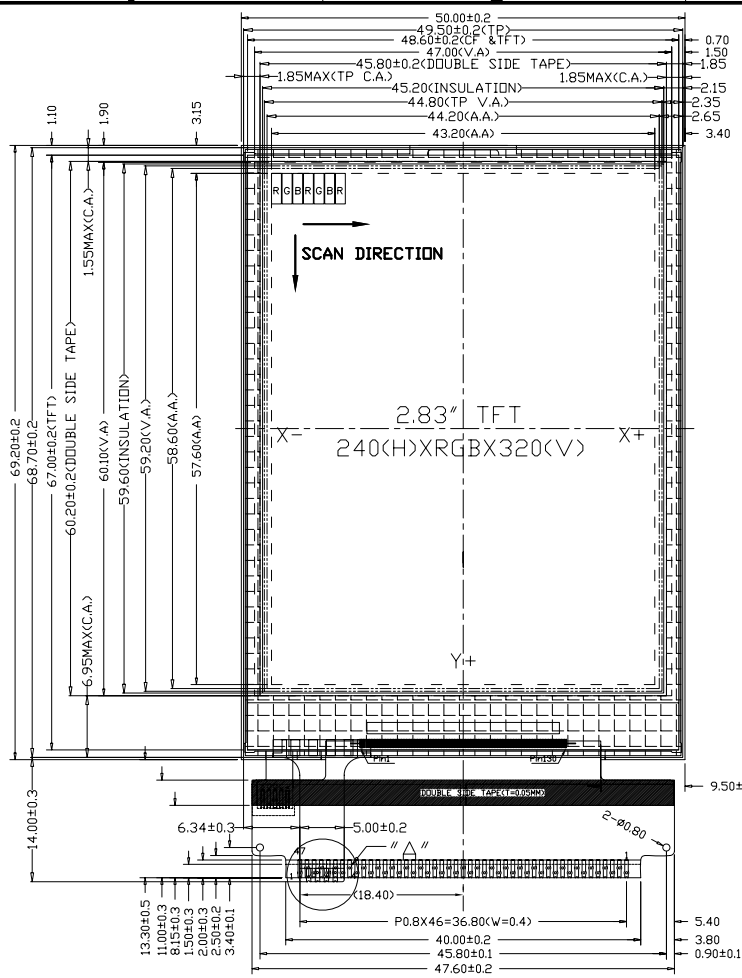


PIN DESCRIPTION

1	IM0	25	DB2
2	IM1	26	DB1
3	IM2	27	DB0
4	IM3	28	SD0
5	RESET	29	SD1
6	VSYNC	30	RD
7	HSYNC	31	WR/SCL
8	DOTCLK	32	RS
9	ENABLE	33	CS
10	DB17	34	FMARK
11	DB16	35	IDVCC
12	DB15	36	VCC
13	DB14	37	VCI
14	DB13	38	GND
15	DB12	39	X<(NC)
16	DB11	40	Y+(NC)
17	DB10	41	X-(NC)
18	DB9	42	Y-(NC)
19	DB8	43	LEDA
20	DB7	44	LEDK1
21	DB6	45	LEDK2
22	DB5	46	LEDK3
23	DB4	47	LEDK4
24	DB3		

### FPC 弯折后客户参考图

### CIRCUIT DIAGRAM

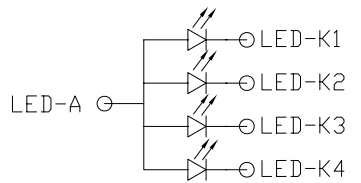

- NOTES:
1. OPERATING TEMPERATURE: -20°C TO 70°C
  2. STORAGE TEMPERATURE: -30°C TO 80°C
  3. DRIVE IC : R61505W
  4. DISPLAY MODE : TRANSFLECTIVE
  5. VIEWING DIRECTION 12:00
  6. ROHS COMPLIANCY (环保标准)
  7. GENERAL TOLERANCE ±0.2

NO.	NAME	QTY	Part No.	VENOR & NOTE
CUSTOMER APPROVE				
AMEND				
MECHANICAL ELECTRICAL				
TOLERANCE: DECIMAL .xx ± .20 <math>\angle \pm 1/4^\circ</math>				
改模, 改良 PANEL 20091203				
NO. CONTENT DATE				
MULTI-INNO TECHNOLOGY CO.,LTD.				
PRODUCT NO. MI0283ST-1			DRAW NO. LCM0738	
DWN 20090602		DSN 20090602		
CHKD 20090602		APPD 20090602		
NOT IN SCALE UNIT mm SHEET: 1/1				