






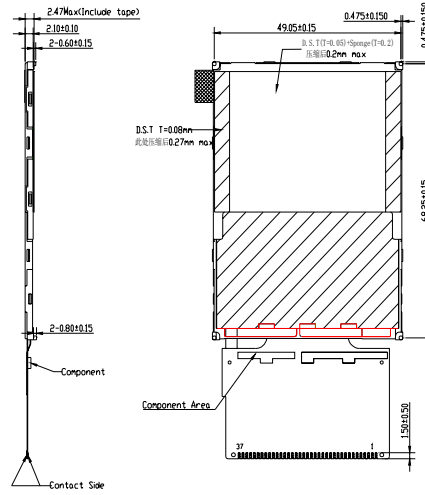

NO	Symbol
1	DB0
2	DB1
3	DB2
4	DB3
5	CND
6	VCC
7	ZCS
8	RS
9	/VR
10	/RD
11	Ⓜ
12	NC(O)
13	NC(Y)
14	NC(X)
15	NC(Y)
16	LED-A
17	LED-K1
18	LED-K2
19	LED-K3
20	LED-K4
21	FMARK
22	DB4
23	DB5
24	DB6
25	DB10
26	DB11
27	DB12
28	DB13
29	DB14
30	DB15
31	/RESET
32	VCI
33	VCC
34	CND
35	DB5
36	DB6
37	DB7

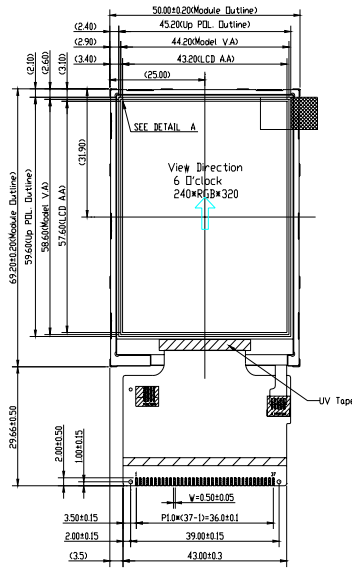

DETAIL: A
SCALE: 50

- NOTES
1. Display Type: 1F1
 2. Backlight: 4-chips LED
 3. Gray Scale: Inversion 12 o'clock
 4. Driver: IC: IL19325
 5. General Tolerance: ±0.2
 6. Requirements on Environment Protection: 0/30002
 7. Recommended case open area should be less than Module V A