
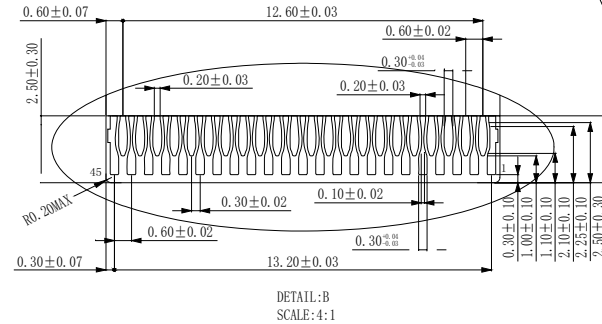


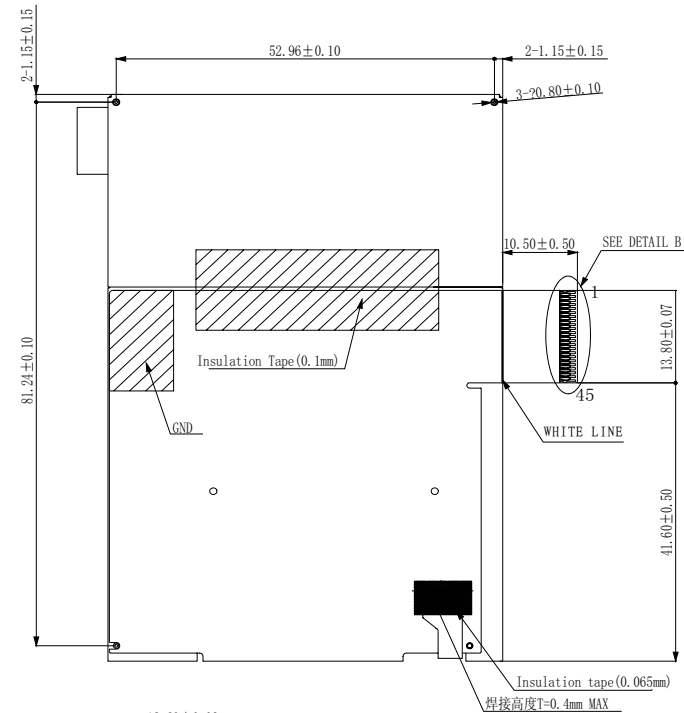
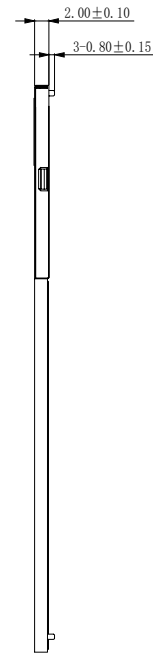


PIN	SYMBOL
1	FLW
2	GND
3	ENABLE
4	BOTCLK
5	YSYNC
6	GND
7	HSTYC
8	LMO
9	IM
10	TRP
11	TOPCLK
12	VCC
13	SDI
14	SDO
15	D17
16	D16
17	D15
18	D14
19	D13
20	D12
21	D11
22	D10
23	D9
24	D8
25	D7
26	D6
27	D5
28	D4
29	D3
30	D2
31	D1
32	DO
33	RESET
34	RD
35	WR/SC
36	RS
37	CS
38	LEDB6
39	LEDB5
40	LEDB4
41	LEDB3
42	LEDB2
43	LEDB1
44	LEDA
45	LCW_ID

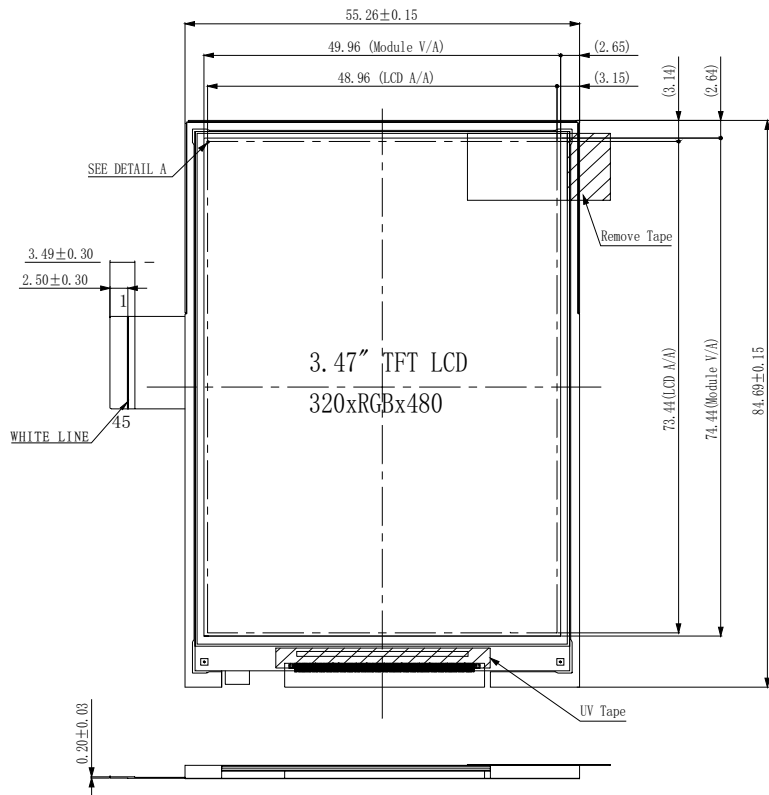

NOTES:

1. Display Type: TFT
2. Backlight: 6-chips LED
3. Driver IC: ILI9486
4. General Tolerance: ±0.2
5. Requirements on Environment Protection: Q/S0002
6. Recommended Case Open Area should be less than Module V.A
7. Connector: FH26-45S-0.3SHW