




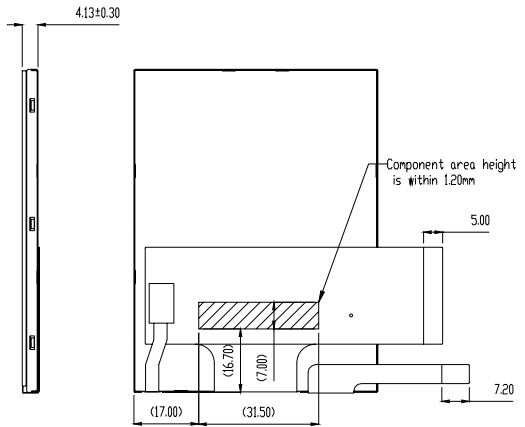

1	A	VLI	26	B1
2	GND	27	B0	
3	VL2	28	ENAB	
4	GND	29	GND	
5	VSHD	30	HSYNC	
6	GND	31	GND	
7	GND	32	DCLK	
8	GND	33	GND	
9	VSYNC	34	G5	
10	GND	35	G4	
11	RESET	36	G3	
12	GND	37	G2	
13	GND	38	G1	
14	GND	39	G0	
15	CS	40	GND	
16	GND	41	R5	
17	SDD	42	R4	
18	SDI	43	R3	
19	GND	44	R2	
20	SCL	45	R1	
21	GND	46	R0	
22	B5	47	GND	
23	B4	48	GND	
24	B3	49	GND	
25	B2	50	GND	

REV	DC/EC NUMBER	DESCRIPTION	DATE

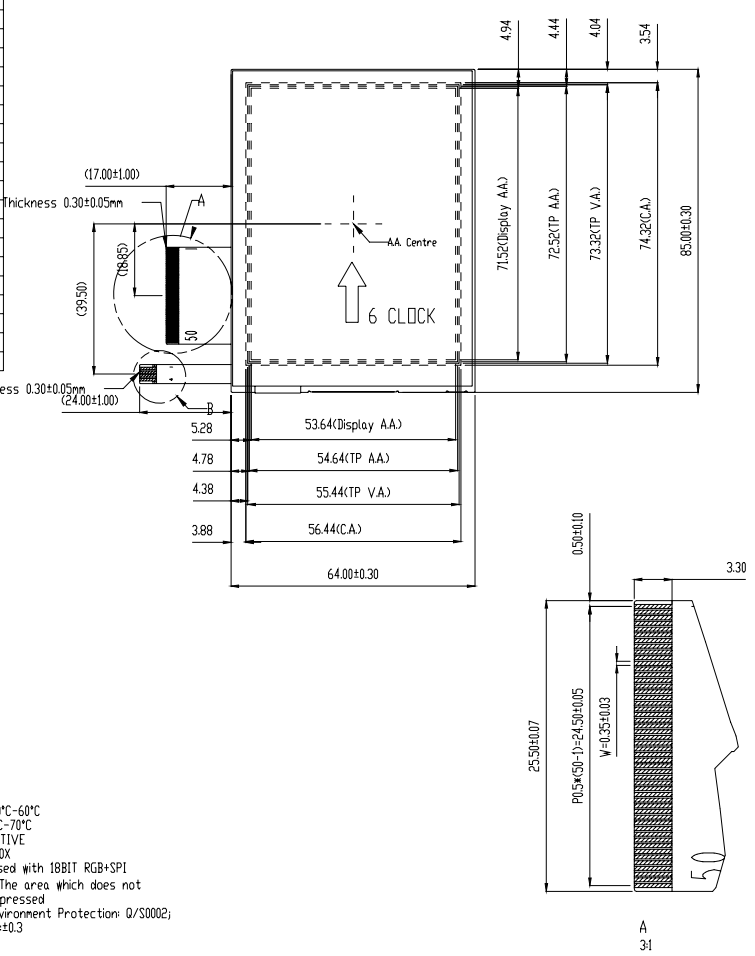

NOTE:
 1.OPERATING TEMP:-20°C-60°C
 2.STORAGE TEMP:-30°C-70°C
 3.LCD-TFT TRANSFLECTIVE
 4.LCD DRIVE-S6DH04H0X
 5.This Module can used with 18BIT RGB+SPI
 6.Compressible area:The area which does not activate even it pressed
 7.Requirement on Environment Protection: 0/S0002;
 8.General tolerance:±0.3

CONTROL DIMENTION:		MULTI-INNO TECHNOLOGY CO.,LTD.	
REFERENCE DIMENTION:	()	Model Name	MI0350BT
APPROVED:	MaXiaoPing 2009/10/26	PART NAME	LCM
CHECKED:	ZhengHuailing 2009/10/26	DRAWING NUMBER	YGT1-00
DESIGNED:	SuYueFeng 2009/10/26	MATERIAL NUMBER	
		3rd ANGLE	UNIT mm
		SCALE	1:1
		PAGE	1/1