




MODULE NO.: MI0350GT-1

Ver 1.0

PRELIMINARY

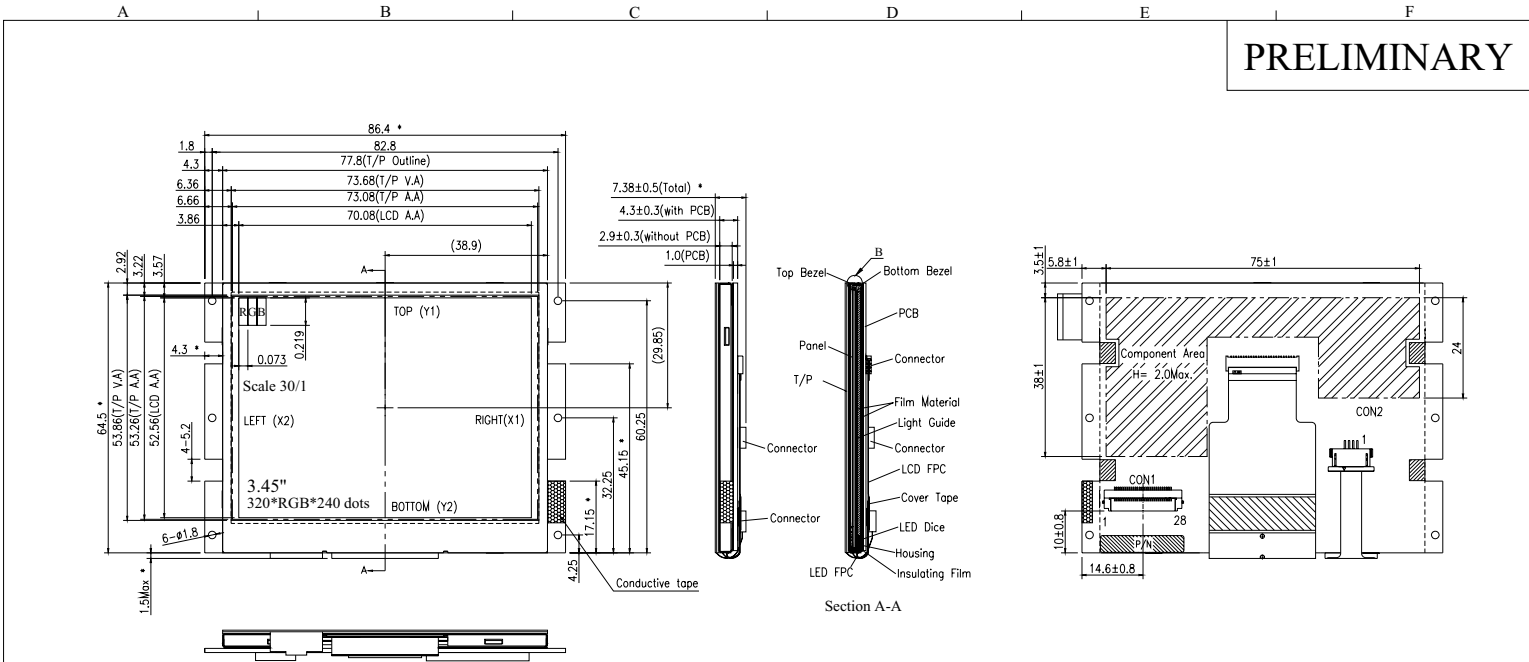

- Note:
- Brightness : 70%
 - Uniformity : 200 cd/m²(Typ)
 - Tolerance is ±0.3 unless otherwise noted.
 - CON 1 Connector: FH12-28S-0.5SH or equivalent (Gold plated).
 - For RoHS
 - * is important dimension.
 - Surface Treatment: Anti-glare.

PIN FUNCTIONS					
1	VDD	11	DB4	21	NC
2	VDD	12	DB3	22	NC
3	/CS	13	DB2	23	NC
4	VSS	14	DB1	24	NC
5	/WR	15	DB0	25	Top(Y1)
6	/RD	16	VSS	26	Right(X1)
7	VSS	17	PWM	27	Bottom(Y2)
8	DB7	18	D/C	28	Left(X2)
9	DB6	19	/RESET		
10	DB5	20	VSS		

				DATE:	04/20/09'	MUTLTI-INNO TECHNOLOGY CO.,LTD.	
				DRAWN:		DWG. NO.	MI0350GT-1
				CHECK:		UNITS	MM
				APPROVE:		SCALE	1 / 1
AUTH	H0904002	DESCRIPTION	DATE	APPROVED		REV.	1
REVISIONS						SHEET 1 OF 1	

