MODULE NO.: MI0350GT

Ver 1.1

PRELIMINARY

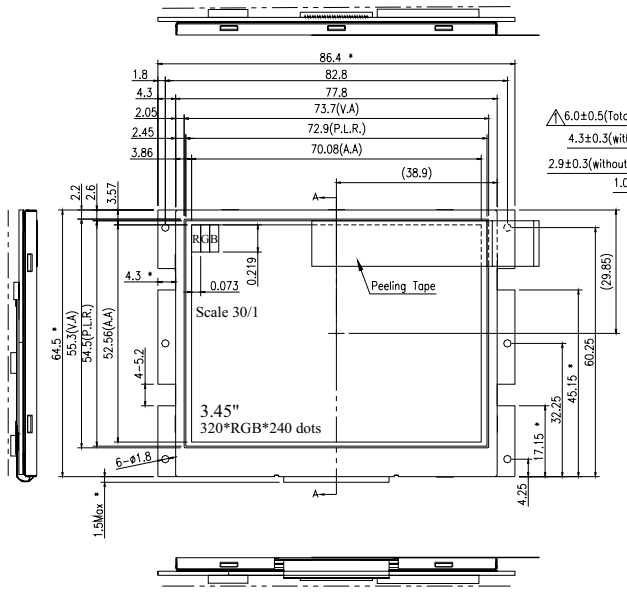

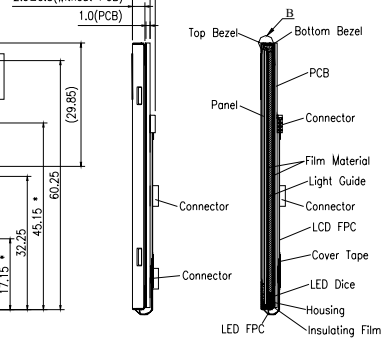

Section A-A

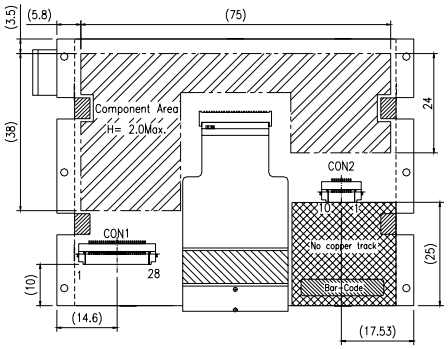



Detail B
Scale 10/1 *9

Note:

1. Brightness : 70%
2. Uniformity : 250 cd/m² (Typ)
3. Tolerance is ±0.3 unless otherwise noted.
4. CON 1 Connector: FH12-28S-0.5SH or equivalent (Gold plated).
5. CON 2 Connector: FH12-10S-0.5SH or equivalent (Gold plated).
6. for RoHS
7. * is important dimension. ⚠

CON1 PIN FUNCTIONS

1	VDD	11	DB4	21	SCK
2	VDD	12	DB3	22	SDI
3	/CS	13	DB2	23	INT
4	VSS	14	DB1	24	VSS
5	/WR	15	DB0	25	ID1I
6	/RD	16	VSS	26	ID1O
7	VSS	17	WAIT	27	ID2I
8	DB7	18	D/C	28	ID2O
9	DB6	19	/RESET		
10	DB5	20	VSS		

CON2 PIN FUNCTIONS

1	VDD	6	INT
2	VSS	7	ID1I
3	SCK	8	ID1O
4	VSS	9	ID2I
5	SDI	10	ID2O

AUTH	DESCRIPTION	DATE	APPROVED
⚠	Change the dimension from 6.0±0.3mm to 6.0±0.5mm, Add the note 7. <S0811009>	11/28/08'	
	<ESR-S0810018>		

REVISIONS

DATE:	11/03/08'
DRAWN:	
CHECK:	
APPROVE:	

MUTLTI-INNO TECHNOLOGY CO.,LTD.

DWG. NO.	MI0350GT		
UNITS M M		REV.	2
SCALE 1 / 1	SHEET 1 OF 1		