


FPC UNFOLDED SHIPMENT



DOTS DETAILS
SCALE 100:1

CUSTOMER REFERENCE

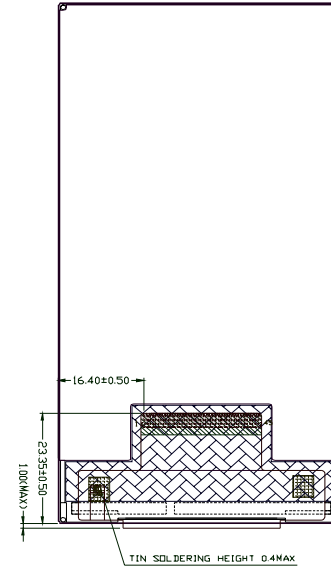


CONNECTION

1	LED_K	24	DB6
2	LED_A	25	DB5
3	GND	26	DB4
4	P68	27	DB3
5	RESET	28	DB2
6	IM0	29	DB1
7	IM1	30	DB0
8	IM2	31	SD0
9	VSYNC	32	SD1
10	HSYNC	33	RD
11	DOTCLK	34	WR_SCL
12	ENABLE	35	RS
13	DB17	36	CS
14	DB16	37	FMARK
15	DB15	38	IDVCC
16	DB14	39	VCC
17	DB13	40	VCI
18	DB12	41	GND
19	DB11	42	Y+
20	DB10	43	X-
21	DB9	44	Y-
22	DB8	45	X+
23	DB7		

NOTES:

1. OPERATING TEMPERATURE: -20°C TO 70°C
2. STORAGE TEMPERATURE: -30°C TO 80°C
3. IC : ILI9326
4. TFT/TRANSMISSIVE
5. BACKLIGHT: 6PCS-WHITE LED
6. ROHS COMPLIANT

LED circuit



恒流测 If=20mA X 1
电压 Vf=12.8V+/-1.2V