





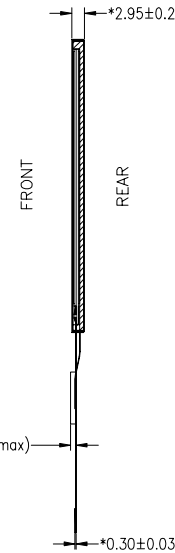


CUSTOMER'S MODEL NO.:

CUSTOMER APPROVED:

DATE:

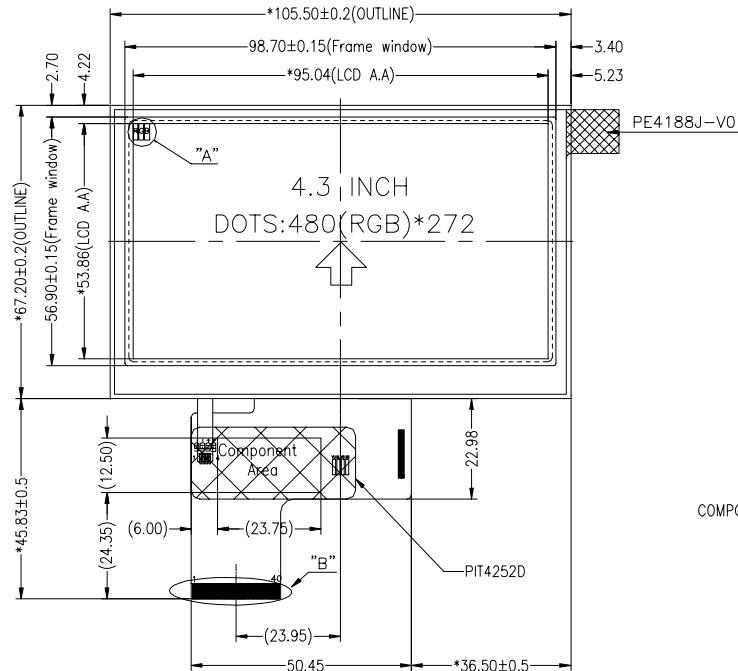

1	LED1-
2	LED2-
3	LED2+
4	LED1+

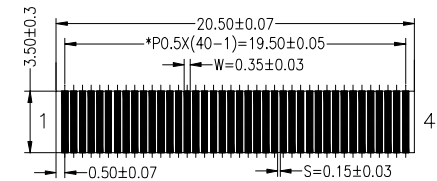


DETAIL B SCALE 4:1
TYPE:FH19S-40S-0.5SH(51)

PIN	FUNCTION
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	AVDD
36	GND
37	XR
38	YD
39	XL
40	YU

NOTES:

1. DISPLAY TYPE:TFT 16.7M color
2. VIEWING DIRECTION: 6 O'CLOCK
3. POLARIZER: TRANSMISSIVE/POSITIVE
4. MODULE BRIGHTNESS: 280cd/m2 MIN
5. OPERATING TEMP: -20°C ~70°C
6. STORAGE TEMP: -30°C ~80°C
7. IC: COG HX8257
8. GENERAL TOLERANCE: ±0.2
9. MARK * MEANS KEY DIMENSION
10. MARK△ MEANS MODIFICATION RECORD
11. BHS-001



BACKLIGHT DIAGRAM

REVISION RECORD		DATE	MULTI-INNO TECHNOLOGY CO.,LTD.	
1			TITLE: LCM OUTLINE DIMENSION	D/N : MI0430FT-2
2			FILE NAME : 模组图	Rev. : 0
3			FILE NO. : LCD-DR-00	Ver. : X
4			DRAWN BY	DATE
5			CHECKED BY	DATE
6			CHECKED BY	DATE
			UNIT : mm	PRO.(3):
			SHEET : 1/1	