


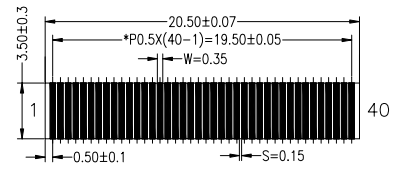


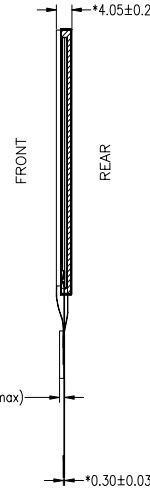

CUSTOMER'S MODEL NO.:

CUSTOMER APPROVED:

DATE:

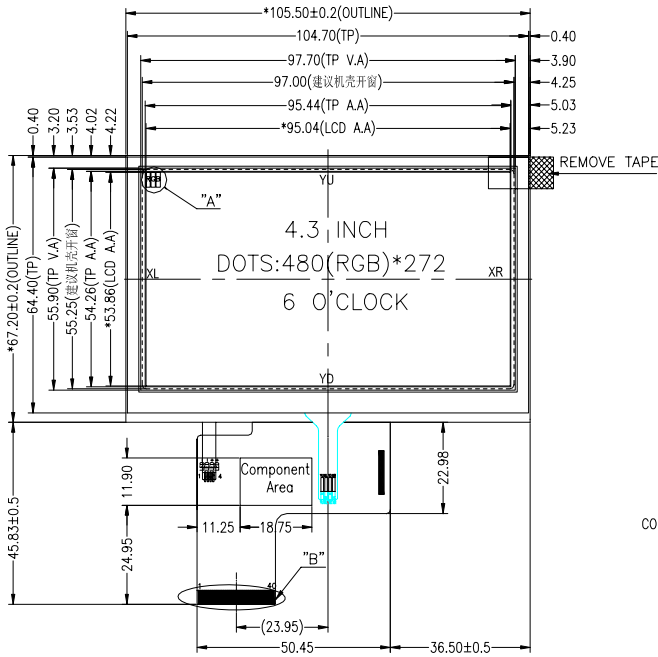


1	LED1-
2	LED2-
3	LED2+
4	LED1+

PIN	description
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	C5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	AVDD
36	GND
37	XR
38	YD
39	XL
40	YU

NOTES:

1. DISPLAY TYPE:TFT 16.7M color
2. VIEWING DIRECTION: 6.O'CLOCK
3. POLARIZER: TRANSMISSIVE/POSITIVE
4. OPERATING TEMP: -20°C ~70°C
5. STORAGE TEMP: -30°C ~80°C
6. IC: COG HX8257
7. GENERAL TOLERANCE: ±0.2
8. \* KEY DIMENSION
9. BHS-001
10. 建议泡棉开窗单边比TP VA大0.5mm以上。

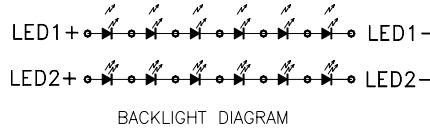

DETAIL B SCALE 4:1  
TYPE:FH19S-40S-0.5SH(51)

REVISION RECORD		DATE	MULTI-INNO TECHNOLOGY CO.,LTD.	
1			TITLE: LCM OUTLINE DIMENSION	D/N :MI0430FT-4
2			FILE NAME :	Rev. : 0 P/N :
3			FILE NO. :	Ver. : X SCALE : N.T.S.
4			DRAWN BY	DATE UNIT : mm
5			CHECKED BY	DATE PRO.(3):
6			CHECKED BY	DATE SHEET : 1/1