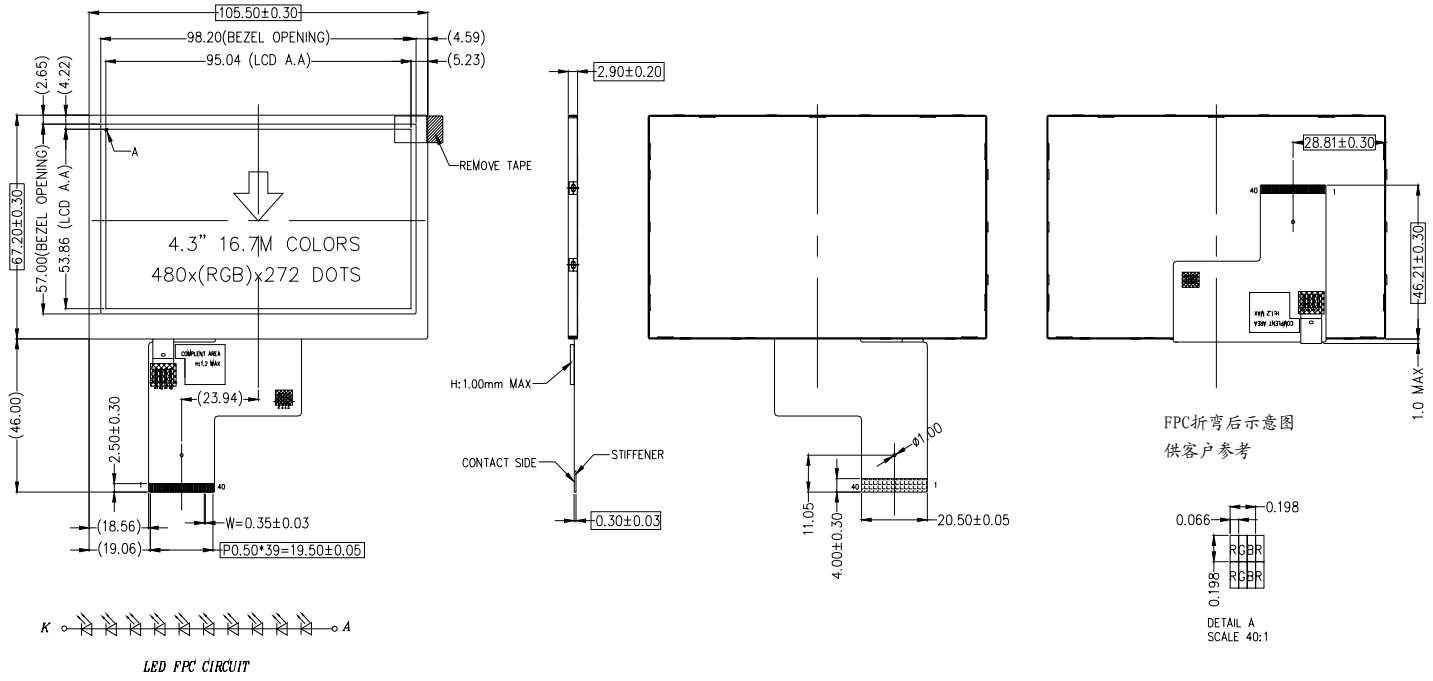


NOTES:

1. DISPLAY TYPE: 4.3", TFT-LCD, 16.7M COLORS
2. DISPLAY MODE: TRANSMISSIVE
3. VIEWING DIRECTION: 12 O'CLOCK (GOOD VIEWING DIRECTION)
4. DVDD: 3.3 V AVDD: 5.0V
5. OPERATING TEMP: -20°C TO 70°C
   STORAGE TEMP: -30°C TO 80°C
6. BACK LIGHT: LED WHITE, 10 LED, 20mA, 33.0V(TYP)
   LCM BRIGHTNESS: 400cd/m2(TYP)
7. KEY DIMENSION: [ ]
   REFERENCED DIMENSION: ( )
8. FPC CONNECTOR:FH19-40S-0.5SH(51) or equivalent
9. REQUIREMENTS ENVIRONMENTAL PROTECTION: RoHS

*PINS ASSIGNMENT*

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| VLED- | VLED+ | GND | DVDD | R0 | R1 | R2 | R3 | R4 | R5 | R6 | R7 | G0 | G1 | G2 | G3 | G4 | G5 |
| 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 |
| G6 | G7 | B0 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | GND | PCLK | DISP | HSYNC | VSYNC | DE | NC | GND |
| 37 | 38 | 39 | 40 | | | | | | | | | | | | | | |
| NC | NC | NC | NC | | | | | | | | | | | | | | |