




NO.	PIN NAME
1	VLED+
2	VLED-
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	X _{R(XR)}
38	Y _{B(YD)}
39	X _{L(XL)}
40	Y _{T(YU)}

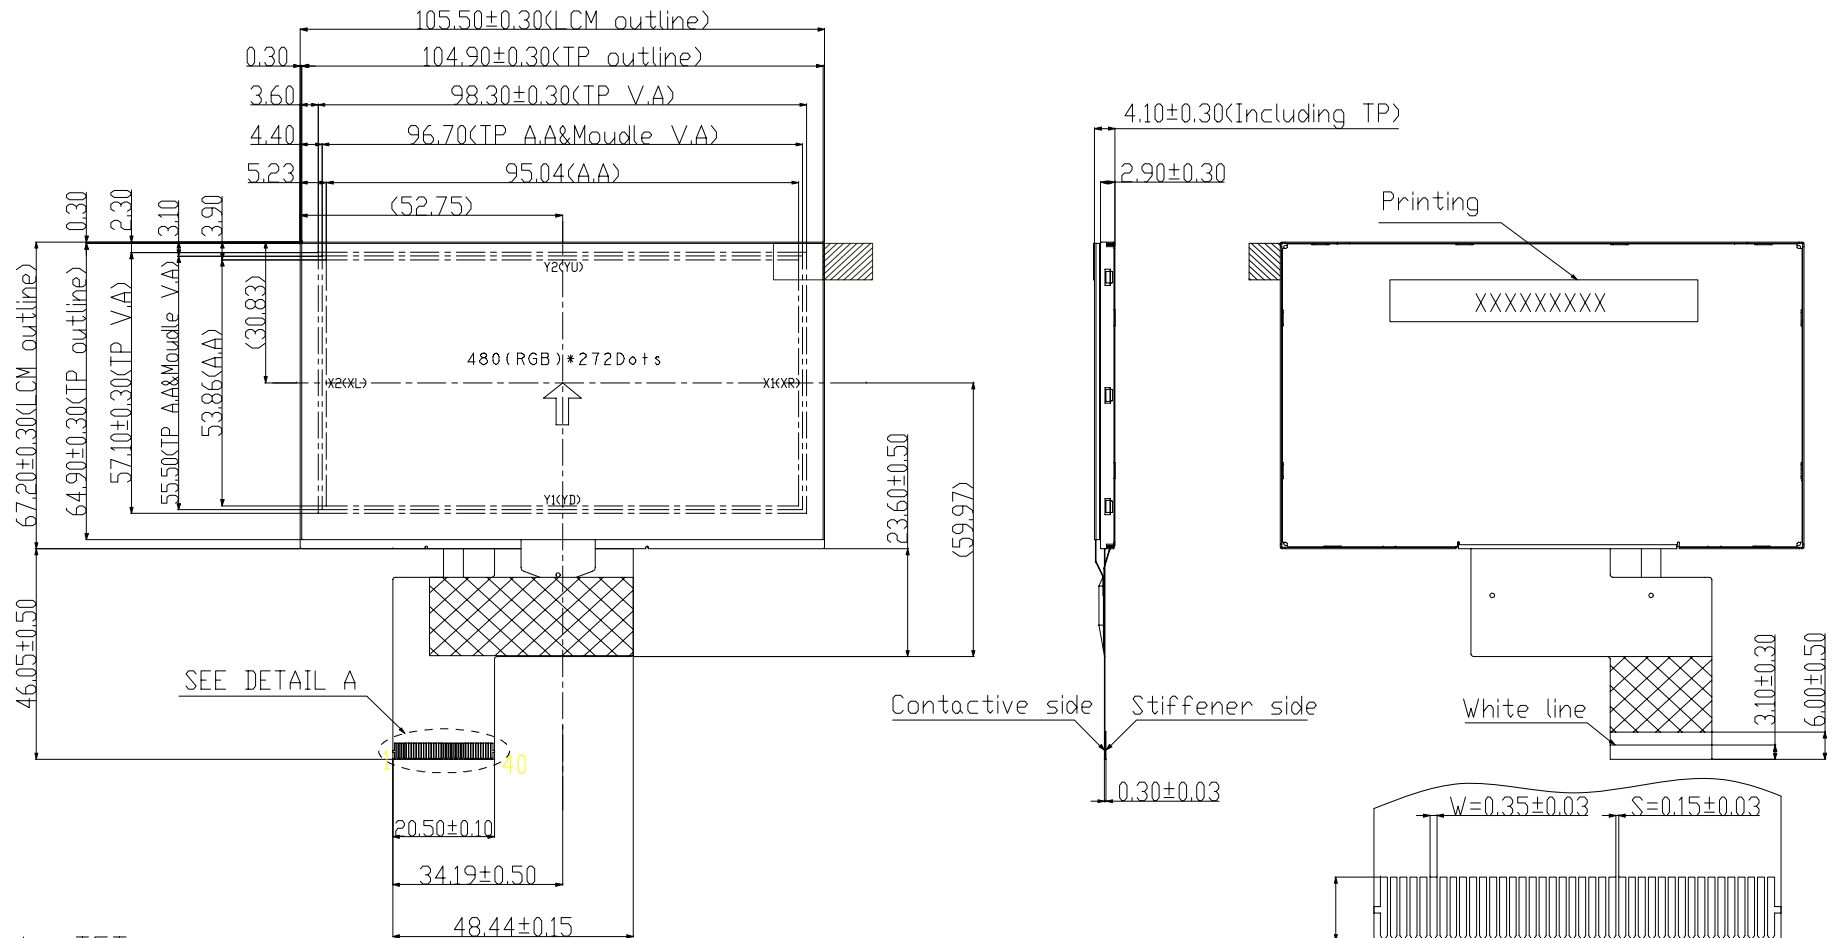

NOTES:

1. Display: TFT;
2. View Direction : 6:00 o'clock;
3. General Tolerance: ±0.20;
4. Driver IC: HX8257A
5. Opening Temperature: -20°C-70°C;
Storage Temperature: -30°C-80°C;
6. Requirements on Environment Protection: Q/S0002.
7. Recommended Case Open Area should be less than Module V.A
8. Recommended Cushion adherent area: TP V.A+1.6mm

