
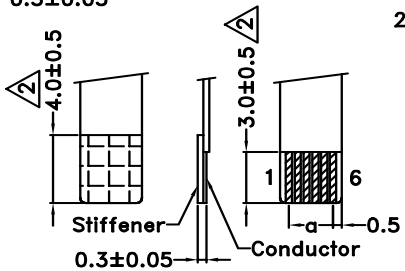
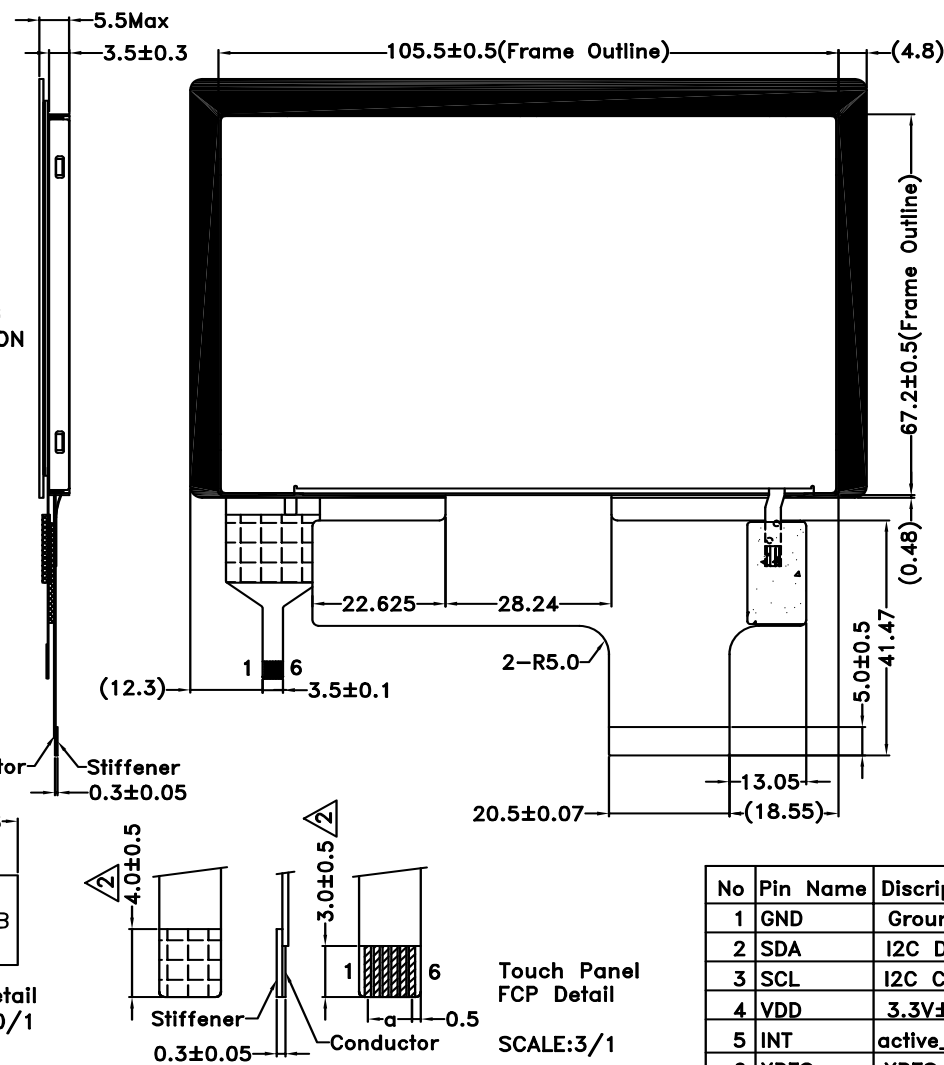



- NOTES:
- LCD TYPE: a-Si TFT
  - LCD DISPLAY: POSITIVE/TRANSMISSIVE
  - VIEW DIRECTION: 6 O'CLOCK
  - Top: -20~70°C Tst: -30~80°C
  - The tolerance unless classified  $\pm 0.2\text{mm}$
  - FPC Component Area (H=1.0Max)  
 Shield tape Stiffener
  - $a=P0.5 \times 5 = 2.5 \pm 0.05$ ,  $w=0.35 \pm 0.05$

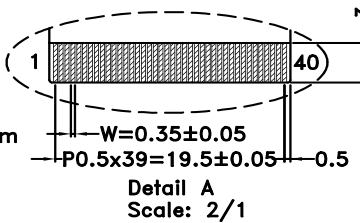

No	Pin Name	Discription
1	GND	Ground
2	SDA	I2C Data
3	SCL	I2C Clock
4	VDD	3.3V±5%
5	INT	active_Low
6	XRES	XRES