Customer No.:

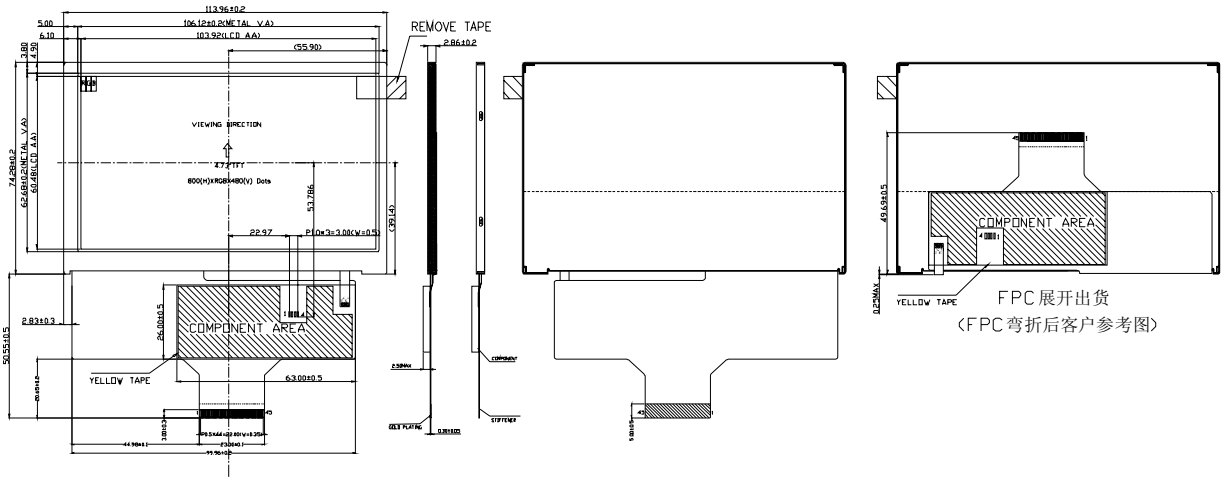

T/P CON

1	X-TP_L
2	Y-TP_B
3	X+TP_R
4	Y+TP_UP

LED CIRCUIT DIAGRAM:



恒定电流测试If=(15*2)mA, 电压Vf=(3.2±0.2)*7V



DETAIL PIXEL (SCALE 200:1)

PIN DESCRIPTION

1	GND	16	PDI1	31	DISP
2	GND	17	PDI2	32	HSYNC
3	VCC	18	PDI3	33	VSYNC
4	VCC	19	PDI4	34	DE
5	PDI6	20	PDI5	35	GND
6	PDI7	21	PD0	36	GND
7	PDI8	22	PD1	37	Y2(NC)
8	PDI9	23	PD2	38	X2(NC)
9	PDI0	24	PD3	39	Y1(NC)
10	PDI1	25	PD4	40	X1(NC)
11	PDI2	26	PD5	41	GND
12	PDI3	27	PD6	42	LED-K1
13	PD8	28	PD7	43	LED-A1
14	PD9	29	GND	44	LED-K2
15	PD10	30	DOTCLK	45	LED-A2

NOTES:

1. DISPLAY TYPE:TFT/TRANSMISSIVE
2. OPERATING TEMP: -20°C~70°C
3. STORAGE TEMP : -30°C~80°C
4. VIEWING DIRECTION: 6:00
5. IC : HX8262*2+HX8662
6. CONNECTOR: FH19SC-45S-0.5SH
7. ROHS COMPLIANT 环保标准
8. GENERAL TOLERANCE: ±0.2

CUSTOMER APPROVE		AMEND		
Mechanical	Electrical	NO.	CONTENT	DATE

液晶显示模块

TOLERANCE: DECIMAL
.x ± .20
∠ ± 1/4°

MULTI-INNO TECHNOLOGY CO.,LTD.

PRODUCT NO. MI0500FT		DRAW NO. CCPA20080818B	REV A
DWN	20080826	DSN	20080905
CHKD	20080826	APPD	20080826
NOT IN SCALE		UNIT mm	SHEET: 1/1