




Pin No.	Symbol
1	AGND
2	AVDD
3	VCC
4	R0
5	R1
6	R2
7	R3
8	R4
9	R5
10	R6
11	R7
12	G0
13	G1
14	G2
15	G3
16	G4
17	G5
18	G6
19	G7
20	R0
21	R1
22	R2
23	R3
24	R4
25	R5
26	R6
27	R7
28	DCLK
29	DE
30	HSD
31	VSD
32	MODE
33	RSTB
34	STBYB
35	SHLR
36	VCC
37	UPDN
38	GND
39	AGND
40	AVDD
41	VCCM
42	DITH
43	NC
44	NC
45	V10
46	V9
47	V8
48	V7
49	V6
50	V5
51	V4
52	V3
53	V2
54	V1
55	NC
56	VGH
57	VCC
58	VGL
59	GND
60	NC

REV	DC/EC NUMBER	DESCRIPTION	DATE

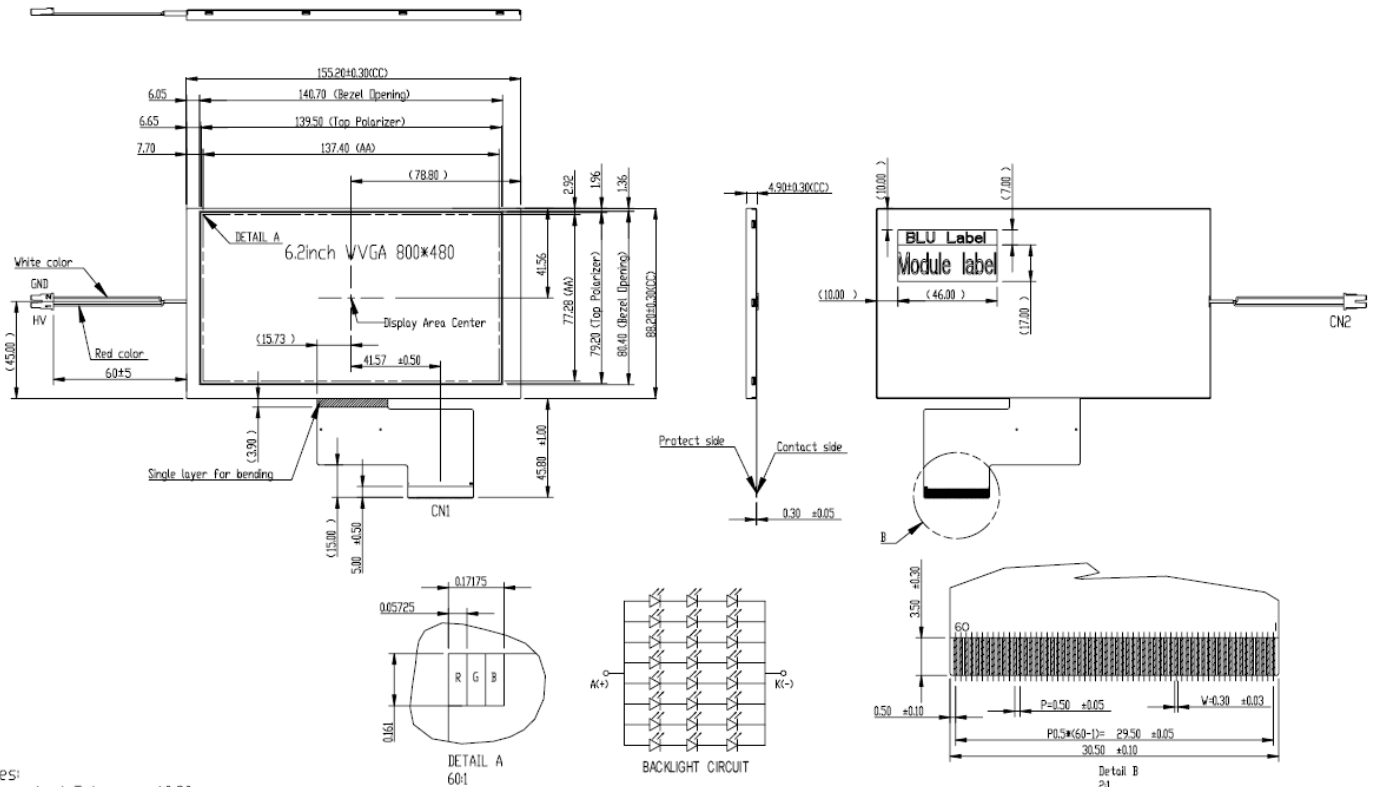

- Notes:
1. Unmarked Tolerance: ±0.30;
  2. Display type: a-Si TFT;
  3. Operating Temperature: -20°C~+70°C;
  4. Storage Temperature: -30°C~+80°C;
  5. LED Power source Connector: BHSR-02VS-1, Recommended matched Connector: SM02B-BHSS-1-TB;
  6. FPC Recommended connector type: FH2B-60S-0.5SH (HIROSE);
  7. Gray Scale inversion: 6 o'clock;
  8. Requirement on Environment Protection: Q/S0002.

CONTROL DIMENTION:			
REFERENCE DIMENTION:			
APPROVED:	Maxiaoping	2009.06.02	<b>MULTI-INNO TECHNOLOGY CO.,LTD.</b> MODEL NAME MI0620BT PART NAME LCM DRAWING NUMBER YGT1-00 MATERIAL NUMBER
CHECKED:	Huchunyan	2009.06.02	
DESIGNED:	Zhenghualing	2009.06.02	
			3rd ANGLE
			UNIT mm
			SCALE 25
			PAGE 1/1