



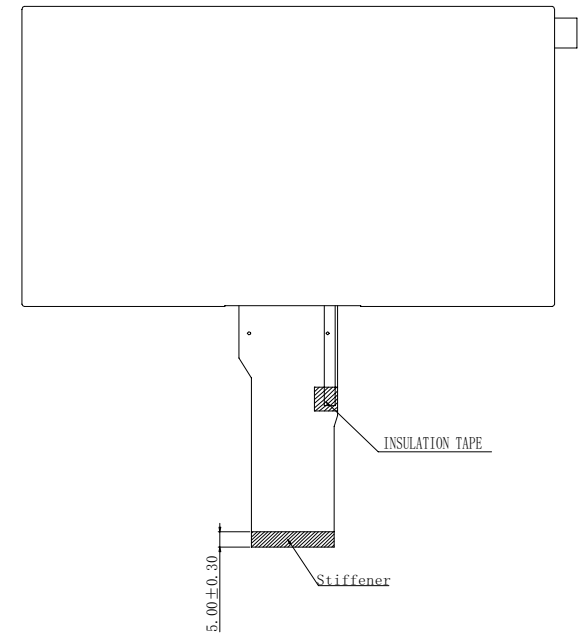


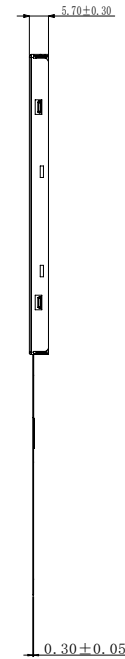

PIN	SYMBOL
1	VLED+
2	VLED-
3	VLED-
4	VLED-
5	CND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

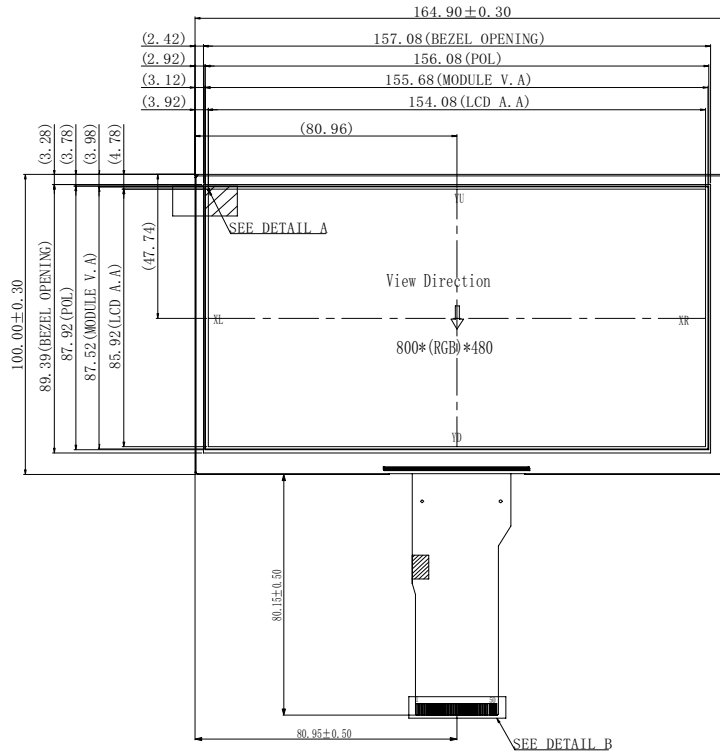

DETAIL: A
SCALE: 40:1

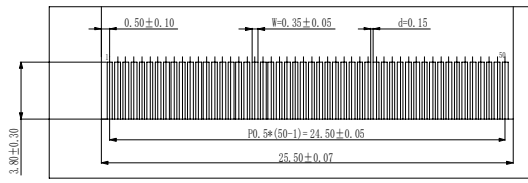

DETAIL: B
SCALE: 5:1

- NOTES:
1. GENERAL TOLERANCE: ± 0.3
 2. DISPLAY TYPE: a-si TFT
 3. GRAY SCALE INVERSION DIRECTION : 6:00 o'clock
 4. OPERATION TEMPERATURE: $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$
 5. STORAGE TEMPERATURE: $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 6. CN1 RECOMMENDED CONNECTOR: HIR OSE FH12A-50S-0.5H
 7. REQUIREMENT ON ENVIRONMENT PROTECTION: Q/S0002
 8. RECOMMENDED CASE OPEN AREA SHOULD BE LESS THAN MODULE V. A