






MODULE NO.: MI0700S1T


Ver 1.1

CN1	PIN	SYMBOL
	1	VLED+
	2	VLED+
	3	VLED-
	4	VLED-
	5	GND
	6	VCOM
	7	D/D0
	8	MODE
	9	DE
	10	VS
	11	HS
	12	BT
	13	B6
	14	B5
	15	B4
	16	B3
	17	B2
	18	B1
	19	B0
	20	G7
	21	G6
	22	G5
	23	G4
	24	G3
	25	G2
	26	G1
	27	G0
	28	R7
	29	R6
	30	R5
	31	R4
	32	R3
	33	R2
	34	R1
	35	R0
	36	GND
	37	DCLK
	38	GND
	39	L/R
	40	U/D
	41	VGH
	42	VGL
	43	AVDD
	44	RESET
	45	NC
	46	VCOM
	47	D/THB
	48	GND
	49	NC
	50	NC


CN2	YU	
	1	YL
	2	XL
	3	YD
	4	XR

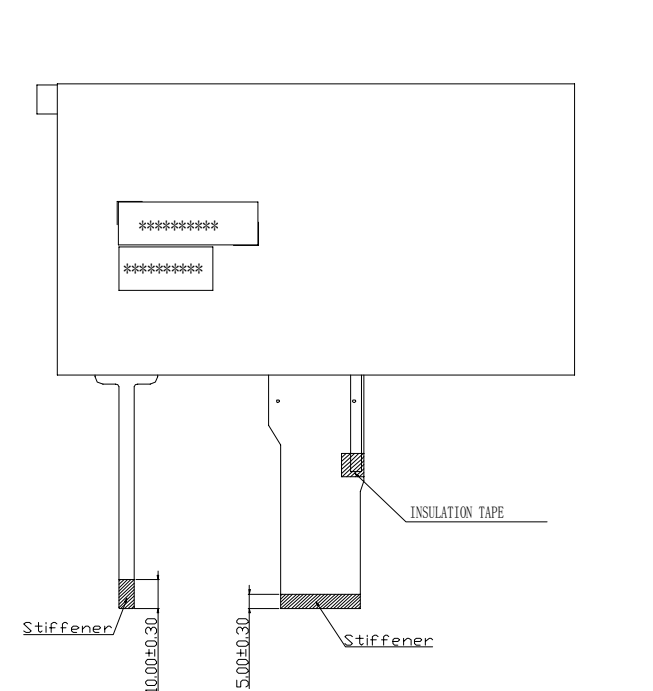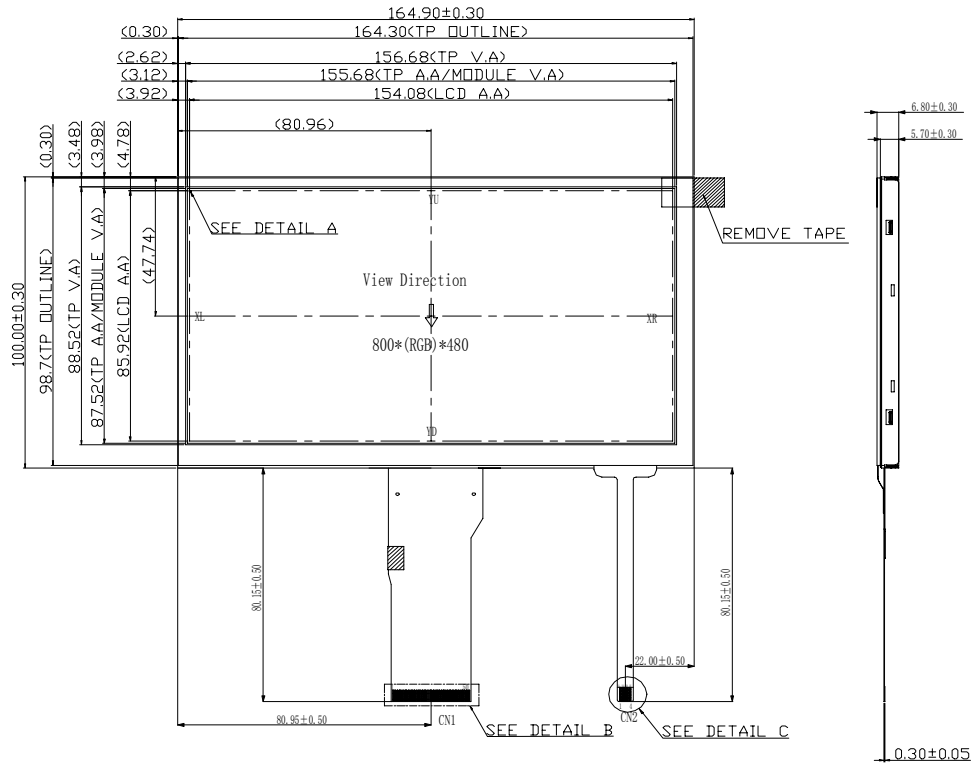

DETAIL: A
SCALE: 40:1

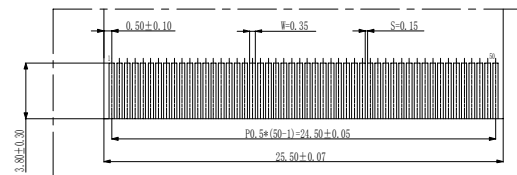

DETAIL: B
SCALE: 5:1



DETAIL: C
SCALE: 2:1

- NOTES:
1. GENERAL TOLERANCE: ± 0.3
 2. DISPLAY TYPE: a-si TFT
 3. GRAY SCALE INVERSION DIRECTION : 6:00 o'clock
 4. OPERATION TEMPERATURE: $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$
 5. STORAGE TEMPERATURE: $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$
 6. CN1 RECOMMENDED CONNECTOR: HIR OSE FH12A-50S-0.5H
CN2 RECOMMENDED CONNECTOR: SFW 4R-1STA1-LF
 7. REQUIREMENT ON ENVIRONMENT PROTECTION: Q/S0002
 8. RECOMMENDED CASE OPEN AREA SHOULD BE LESS THAN MODULE V.A
 9. RECOMMENDED CUSHION ADHERENT AREA: TP V.A+1.6mm